

11260000	DATA SHEET	
Valid from: 12.06.2024	EPIC® H-D 25 SCG / H-D 25 BCG stamped	

Description

- EPIC® H-D inserts for stamped crimp contacts
- Inserts of the connector series EPIC® H-D are designed for applications in which a high number of contacts are required.



General Characteristics

Series	EPIC® H-D 25
Version	Male (Article 11260000) / Female(Article 11261000)
Number of Contacts	25 + PE
Termination Methods	Crimp termination: 0.14 - 2.5 mm²
Temperature Range	-40°C to +100°C, short-term up to +125°C

Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----

Electrical Characteristics

Rated Voltage, IEC	250 V
Rated Voltage, UL	250 V
Rated Impulse Voltage	2.5 kV
Rated Current, IEC	10 A
Rated Current, UL	10 A
Contact Resistance	< 2 mOhm
Degree of Soiling	3

Materials and Surfaces

Contacts	Copper alloy, hard silver/gold-plated
Insulating Body	PC
Flammability Class according to UL 94	V0

Approvals

UL-Approval, E-File-Number	E75770
VDE-Approval, VDE-REG.-Nr.	B437

Standard

Safety Standard	IEC 61984, UL 1977
-----------------	--------------------

Suitable cntacts


Male contact	EPIC® H-D SCG EPIC® H-D SCBG ...
Female contact	EPIC® H-D BCG ... EPIC® H-D BCBG ...

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB1126000EN Version: 04	Page 1 of 3
---	--------------------------------------	-------------


11260000	DATA SHEET	
Valid from: 12.06.2024	EPIC® H-D 25 SCG / H-D 25 BCG stamped	

Technical Drawings


EPIC® H-D 25 SCG 11260000 male insert

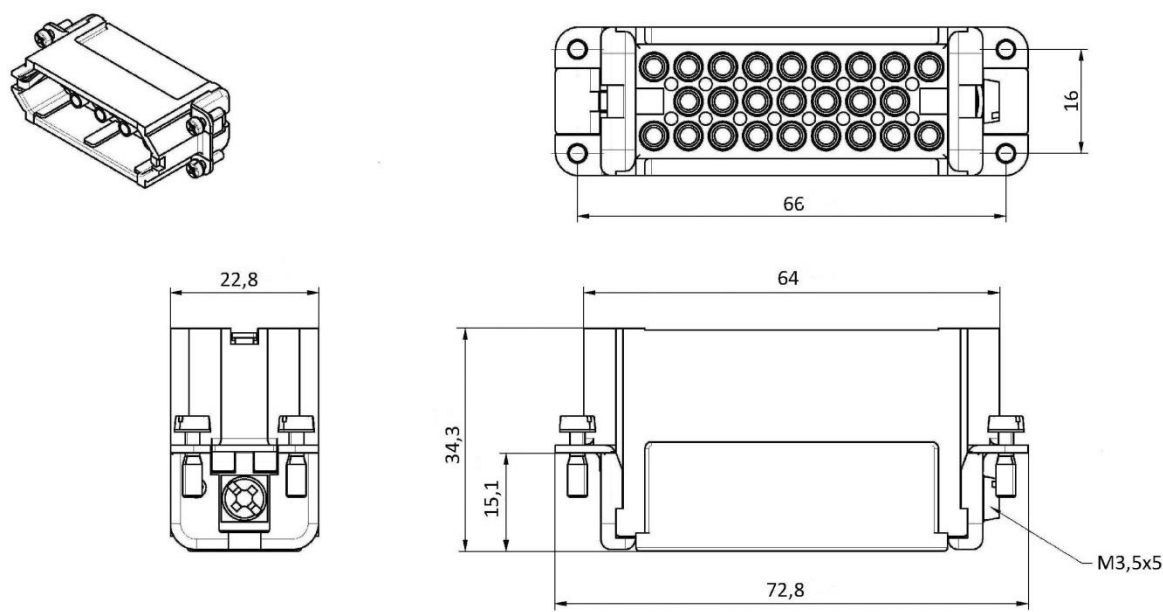

EPIC® H-D 25 BCG 11261000 female Insert

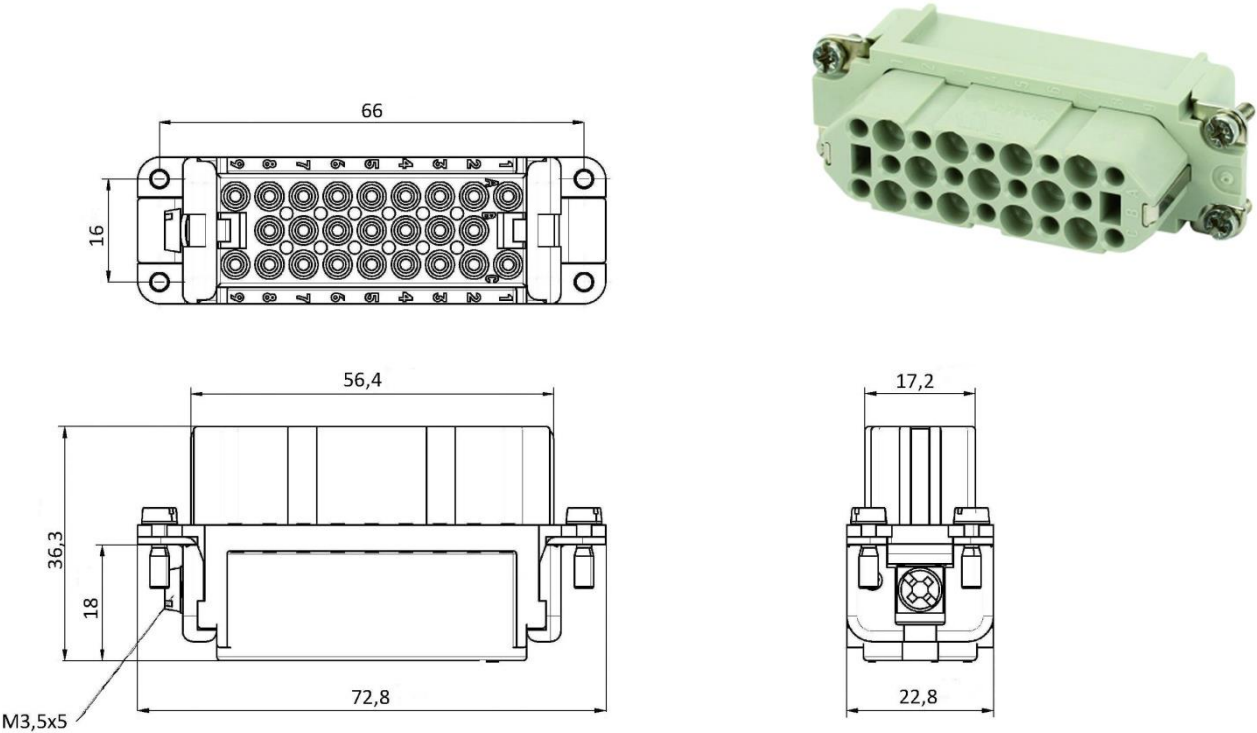

11260000	DATA SHEET	
Valid from: 12.06.2024	EPIC® H-D 25 SCG / H-D 25 BCG stamped	



Industrial machinery and plant engineering

Application range

Machine and equipment manufacturing
Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB1126000EN Version: 04	Page 3 of 3
---	--------------------------------------	-------------