

10390600	DATA SHEET	
Valid from: 17.09.2018	EPIC® MCS 4 SS / MCS 4 BS UNIVERSALBUS	

Description

- The mixed assembly guarantees high flexibility. For applications in mechanical and plant engineering, for printing machines and slide-in technology
- Assembly of individual connectors, suitable for different applications



Artikel No.	Module	VPE
10390600	Male	10
10390700	Female	10

General Characteristics

Series	MC Module
Number of Contacts	4 + shield
Termination Methods	Screw termination: 0.08 - 1.5 mm ²
Temperature Range	-20°C to +85°C

Mechanical Characteristics

Cycles of mechanical operation	100
--------------------------------	-----

Electrical Characteristics

Rated Voltage	30 V
Rated Current	1 A
Pollution Degree	3


Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10390600EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

10390600	DATA SHEET	
Valid from: 17.09.2018	EPIC® MCS 4 SS / MCS 4 BS UNIVERSALBUS	


Technical Drawing



M

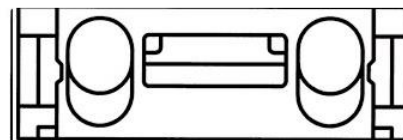

F

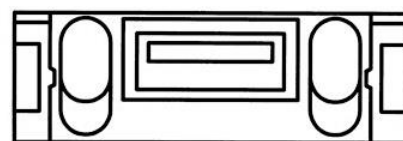

Automation



Industrial machinery and plant engineering



Wind Energy

Info

Power and signal modules can be used together in one housing

Application range

Plant engineering
Light & sound technology
Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10390600EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------