

10491100	DATA SHEET	
Valid from: 21.09.2021	EPIC® STA 14 SS / STA 14 FS	

Description

- The proven STA inserts for screw termination and solder termination.
- STA inserts - proven by the strong contact springs.



Male

General Characteristics

Series	STA 14
Version	Male (Article 10491100)/Spring(Article 10493100)
Number of Contacts	14
Termination Methods	Screw termination: 0,5 to 1.5 mm ²
Temperature Range	-40°C to +80°C

Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----

Electrical Characteristics

Rated Voltage, IEC	24 V AC, 60 V DC
Rated Voltage, UL	48 V
Rated Current, IEC	7,5 A
Rated Current, UL	7,5 A
Contact Resistance	< 3 mOhm
Degree of Soiling	2

Materials and Surfaces

Contacts	Copper alloy, tinned
Insulating Body	PC
Flammability Class according to UL 94	V0

Approvals

UL-Approval, E-File-Number	E75770
----------------------------	--------


Standard

Safety Standard	IEC 61984, UL 1977
-----------------	--------------------

Creator: JOKR1/PDP Released: IVSE1/PDP	Document: DB10491100EN Version: 04	Page 1 of 2
---	---------------------------------------	-------------



10491100	DATA SHEET	
Valid from: 21.09.2021	EPIC® STA 14 SS / STA 14 FS	

Technical Drawings

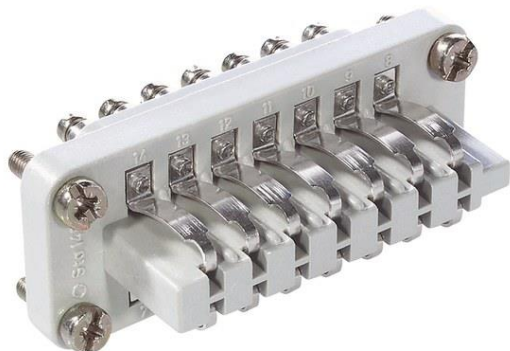


M

S

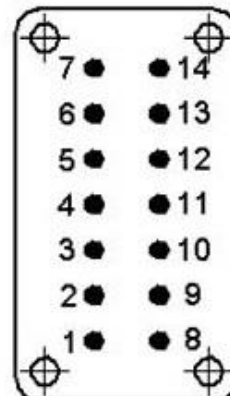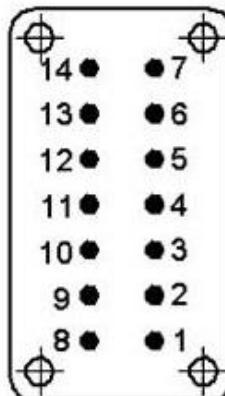

Spring

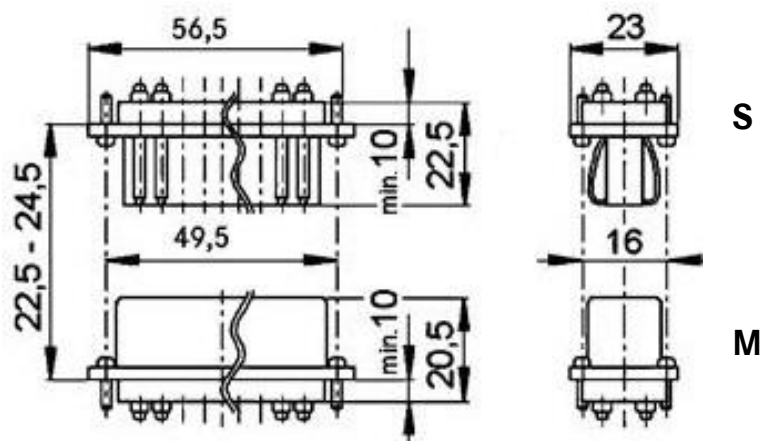

Industrial machinery and plant engineering

Application range

Control systems
Rack technology
Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: JOKR1/PDP Released: IVSE1/PDP	Document: DB10491100EN Version: 04	Page 2 of 2
---	---------------------------------------	-------------