

|                           |                          |                                                                                     |
|---------------------------|--------------------------|-------------------------------------------------------------------------------------|
| 70140400                  | <b>DATA SHEET</b>        |  |
| Valid from:<br>17.09.2018 | <b>EPIC® H-B 24 TBFH</b> |                                                                                     |

## Description

- Ideal for many applications due to a wide range of housings and inserts



## General Characteristics

|                              |                                                    |
|------------------------------|----------------------------------------------------|
| Series                       | H-B 24                                             |
| Version                      | Cable coupler hood PG 21 / PG29 (Article 70140600) |
| Gland body                   | Yes                                                |
| Locking                      | Double lever                                       |
| Cable entry                  | Straight                                           |
| Protection (DIN EN 60529)    | IP 65 (latched)                                    |
| Protection (NEMA 250, UL50E) | 12 (latched)                                       |
| Temperature Range            | -40°C to +100°C, short term up to +125°C           |

## Materials and Surfaces

|            |                                      |
|------------|--------------------------------------|
| Housing    | Aluminium alloy, powder-coated, grey |
| Bolt       | Heat-treatable steel, zinc-plated    |
| Lever      | Steel, zinc-plated                   |
| Gland body | Brass, nickel plated                 |
| Sealing    | NBR                                  |

## Approvals

|                            |      |
|----------------------------|------|
| VDE-Approval, VDE-REG.-Nr. | B437 |
|----------------------------|------|


## Standard

|                 |           |
|-----------------|-----------|
| Safety Standard | IEC 61984 |
|-----------------|-----------|

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: MANA2/PDP<br>Released: IVSE1/PDP | Document: DB70140400EN<br>Version: 01 | Page 1 of 2 |
|-------------------------------------------|---------------------------------------|-------------|

|                           |                   |                                                                                     |
|---------------------------|-------------------|-------------------------------------------------------------------------------------|
| 70140400                  | <b>DATA SHEET</b> |  |
| Valid from:<br>17.09.2018 | EPIC® H-B 24 TBFH |                                                                                     |

## Technical Drawings

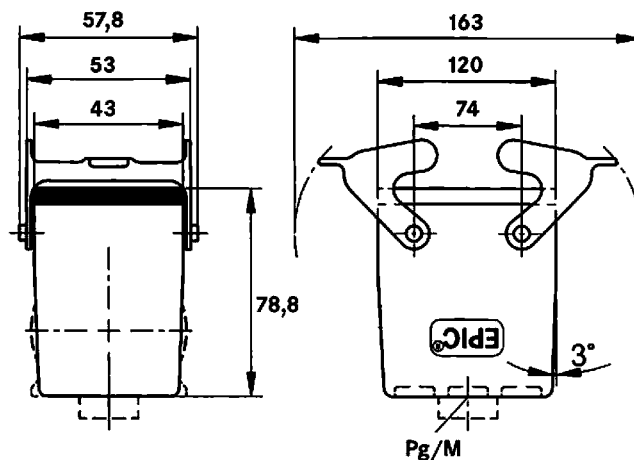

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

## Info

Universal, robust metal housings size H-B 24

## Application range

Plant engineering  
Light & sound technology  
Plastics industry

## Remark

Photographs are not to scale and do not represent detailed images of the respective products.

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: MANA2/PDP<br>Released: IVSE1/PDP | Document: DB70140400EN<br>Version: 01 | Page 2 of 2 |
|-------------------------------------------|---------------------------------------|-------------|