


Walraven BISOFIX® PIR40

(D0370)

for insulated pipes

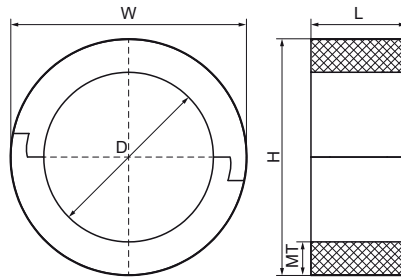

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45 \text{ °C} - +105 \text{ °C}$



Product Number	DN	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	D	H	W	L	MT	F _{a,z}
Unit description		mm	mm	mm	mm	N
I40000273		353	353	150	40.00	5,320
I40000219	DN 200	299	299	150	40.00	4,510
I40000168	DN 150	248	248	100	40.00	2,960
I40000140	DN 125	220	220	100	40.00	1,730
I40000012		92	92	75	40.00	300
I40000015		95	95	75	40.00	320
I40000018	DN 10	98	98	75	40.00	340
I40000020		100	100	75	40.00	340
I40000022	DN 15	102	102	75	40.00	350
I40000025		105	105	75	40.00	350
I40000028	DN 20	108	108	75	40.00	350
I40000032		112	112	75	40.00	370
I40000034		115	115	75	40.00	370
I40000040		120	120	75	40.00	400
I40000042	DN 32	122	122	75	40.00	410
I40000048	DN 40	128	128	75	40.00	430
I40000054		134	134	75	40.00	440
I40000057		137	137	75	40.00	460
I40000060	DN 50	140	140	75	40.00	470
I40000064		144	144	75	40.00	490
I40000070		150	150	75	40.00	510
I40000076	DN 65	156	156	75	40.00	530
I40000089	DN 80	169	169	75	40.00	620
I40000102		182	182	75	40.00	650
I40000108		188	188	75	40.00	690
I40000114	DN 100	194	194	100	40.00	1,530
I40000133		213	213	100	40.00	167
I40000160		240	240	100	40.00	2,850
I40000324		404	404	150	40.00	6,090
I40000406		486	486	150	40.00	6,150