



Features

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- Standby power consumption <0.5W at remote off
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming (dim-to-off)
- Typical lifetime > 62000 hours
- 7 years warranty

Applications

- LED high-bay lighting
- Parking space lighting
- LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I , Division 2 hazardous (Classified) location.

GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

HLG-600H series is a 600W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-600H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 96%, with the fanless design, the entire series is able to operate for -40°C ~ +90°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-600H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding

HLG - 600H - 15 A

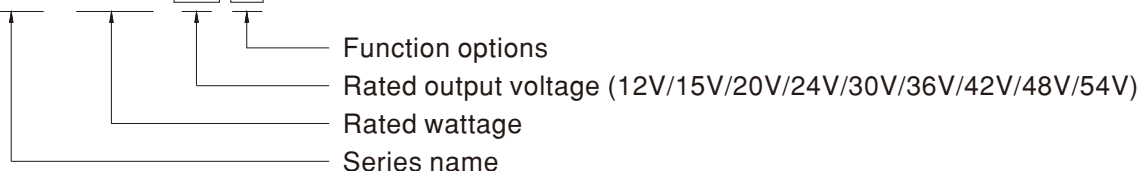


Type	IP Level	Function	Note
A	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
B	IP67	3 in 1 dimming function (0~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (0~10VDC, 10V PWM signal and resistance)	In Stock
Blank	IP67	Io and Vo fixed	In Stock

MODEL	HLG-600H-12		HLG-600H-15		HLG-600H-20		HLG-600H-24		HLG-600H-30		HLG-600H-36		HLG-600H-42		HLG-600H-48		HLG-600H-54			
OUTPUT	DC VOLTAGE		12V		15V		20V		24V		30V		36V		42V		48V		54V	
	CONSTANT CURRENT REGION Note.4		6 ~ 12V		7.5 ~ 15V		10 ~ 20V		12 ~ 24V		15 ~ 30V		18 ~ 36V		21 ~ 42V		24 ~ 48V		27 ~ 54V	
	RATED CURRENT		40A		36A		28A		25A		20A		16.7A		14.3A		12.5A		11.2A	
	RATED POWER		480W		540W		560W		600W		600W		601.2W		600.6W		600W		604.8W	
	RIPPLE & NOISE (max.) Note.2		150mVp-p		150mVp-p		150mVp-p		150mVp-p		200mVp-p		250mVp-p		250mVp-p		250mVp-p		350mVp-p	
	VOLTAGE ADJ. RANGE		Adjustable for A-Type only (via built-in potentiometer)																	
			10.2 ~ 12.6V		12.7 ~ 15.8V		17 ~ 21V		20.4 ~ 25.2V		25.5 ~ 31.5V		30.6 ~ 37.8V		35.7 ~ 44.1V		40.8 ~ 50.4V		45.9 ~ 56.7V	
	CURRENT ADJ. RANGE		Adjustable for A-Type only (via built-in potentiometer)																	
			20 ~ 40A		18 ~ 36A		14 ~ 28A		12.5 ~ 25A		10 ~ 20A		8.3 ~ 16.7A		7.1 ~ 14.3A		6.2 ~ 12.5A		5.6 ~ 11.2A	
	VOLTAGE TOLERANCE Note.3		± 3.0%		± 2.0%		± 1.5%		± 1.0%		± 1.0%		± 1.0%		± 1.0%		± 1.0%		± 1.0%	
	LINE REGULATION		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%	
LOAD REGULATION		± 2.0%		± 1.5%		± 1.0%		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%		
SETUP, RISE TIME Note.6		500ms, 80ms/ 115VAC, 230VAC																		
HOLD UP TIME (Typ.)		15ms / 115VAC, 230VAC																		
INPUT	VOLTAGE RANGE Note.5		90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)																	
	FREQUENCY RANGE		47 ~ 63Hz																	
	POWER FACTOR (Typ.)		PF ≥ 0.98/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.93/277VAC @ full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)																	
	TOTAL HARMONIC DISTORTION		THD< 20% (@ load ≥ 50% /115VAC, 230VAC; @ load ≥ 75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION (THD)" section)																	
	EFFICIENCY (Typ.)	230VAC	92%	93.5%	94.5%	95%	95%	95.5%	96%	96%	96%	96%	96%	96%	96%	96%	96%	96%	96%	96%
		277VAC	92.5%	93.5%	94.5%	95%	95%	95.5%	96%	96%	96%	96%	96%	96%	96%	96%	96%	96%	96%	96%
	AC CURRENT (Typ.)		7A / 115VAC 3.3A / 230VAC 2.9A / 277VAC																	
	INRUSH CURRENT(Typ.)		COLD START 70A(twidth=1000μs measured at 50% Ipeak) at 230VAC; Per NEMA 410																	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER		1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC																	
	LEAKAGE CURRENT		<0.75mA / 277VAC																	
	STANDBY POWER CONSUMPTION		<0.5W at remote off																	
PROTECTION	OVER CURRENT Note.4		95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed																	
	SHORT CIRCUIT		Constant current limiting, recovers automatically after fault condition is removed																	
	OVER VOLTAGE		13 ~ 16V	16.5 ~ 20.5V	22 ~ 26V	26 ~ 30V	32.5 ~ 36.5V	39.5 ~ 43.5V	46 ~ 50V	52.5 ~ 56.5V	59 ~ 63V									
			Shut down o/p voltage, re-power on to recover																	
OVER TEMPERATURE		Shut down o/p voltage, re-power on to recover																		
FUNCTION	REMOTE ON/OFF CONTROL		Power on : "High" >2 ~ 5V or Open circuit Power off : "Low" <0 ~ 0.5V or Short circuit																	
	5V STANDBY		5Vsb : 5V@0.5A; tolerance ±5%, ripple : 100mVp-p(max.)																	
ENVIRONMENT	WORKING TEMP.		Tcase= -40 ~ +90℃ (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)																	
	MAX. CASE TEMP.		Tcase= +90℃																	
	WORKING HUMIDITY		20 ~ 95% RH non-condensing																	
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing																	
	TEMP. COEFFICIENT		± 0.03%/℃ (0 ~ 55℃)																	
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes																	
SAFETY & EMC (Note 10)	SAFETY STANDARDS Note.7		UL60950-1, UL8750(type"HL"), CSA C22.2 No. 250.13-12, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384, IP65 or IP67, J61347-1, J61347-2-13, GB19510.1,GB19510.14, EAC TP TC 004, AS/NZS 60950.1(by CB)(AB type except),KC61347-1, KC61347-2-13(for 24A,36A,48A,54A only) approved																	
	WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC																	
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH																	
	EMC EMISSION Note.7		Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≥ 50%) ; BS EN/EN61000-3-3, EAC TP TC 020; GB/T17743,GB17625.1, KC KN15, KN61547(for 24A,36A,48A,54A only)																	
	EMC IMMUNITY		Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020; KC KN15, KN61547(for 24A,36A,48A,54A only)																	
OTHERS	MTBF		913.4K hrs min. Telcordia SR-332 (Bellcore) ; 76.9K hrs min. MIL-HDBK-217F (25℃)																	
	DIMENSION		280*144*48.5mm (L*W*H)																	
	PACKING		3.9Kg; 4pcs/16.6Kg/0.9CUFT																	
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Please refer to "DRIVING METHODS OF LED MODULE". 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 7. The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model . Please contact MEAN WELL for details. 8. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75℃ or less. 9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 10. The driver is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 11. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx																			


File Name:HLG-600H-SPEC 2023-12-22

■ BLOCK DIAGRAM

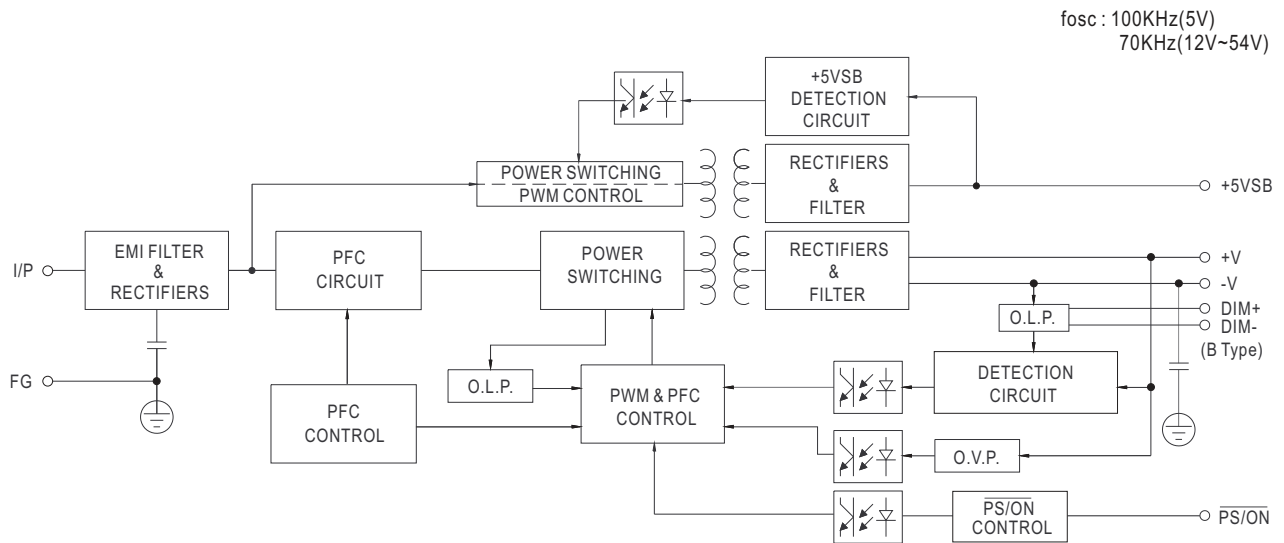

■ DRIVING METHODS OF LED MODULE

※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

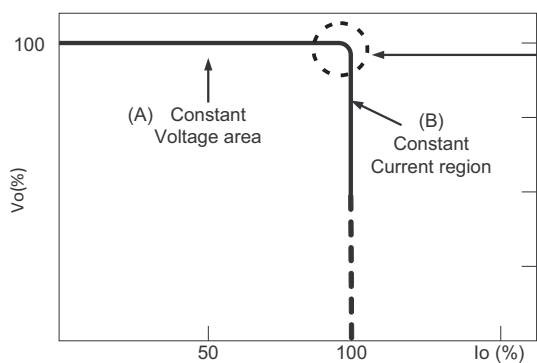


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



DIMMING OPERATION

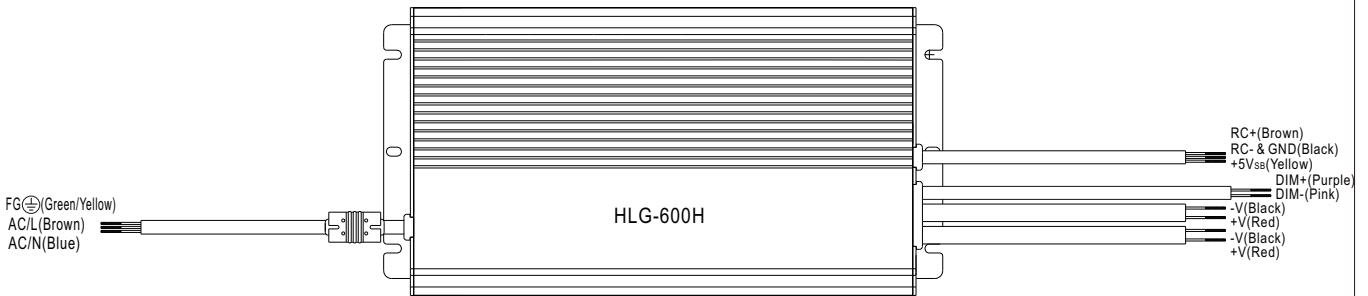



※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



◎ Applying additive 0 ~ 10VDC

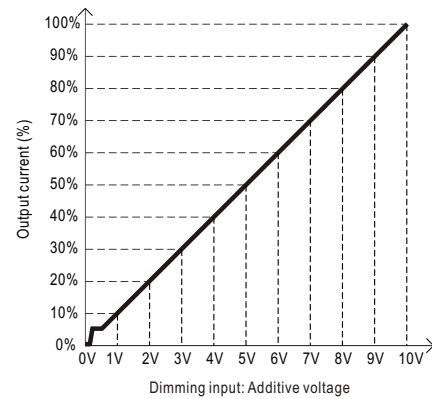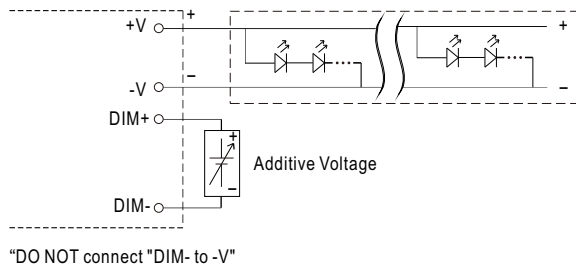

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

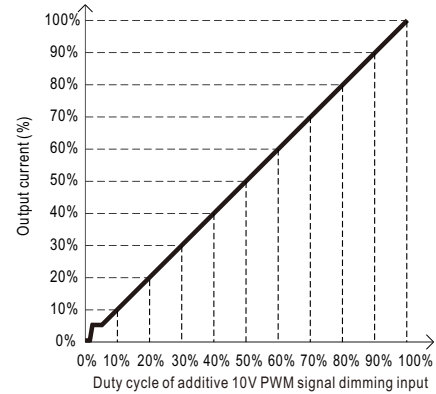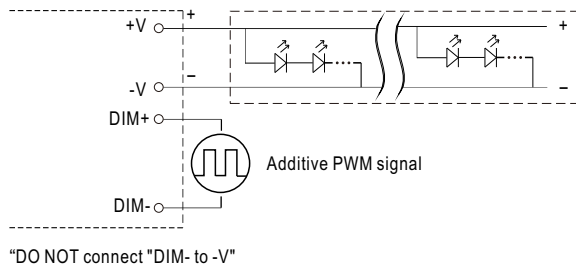


◎ Applying additive resistance:

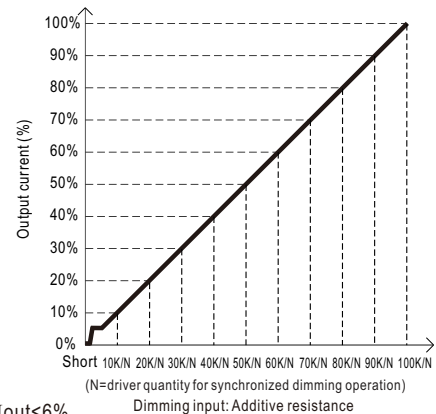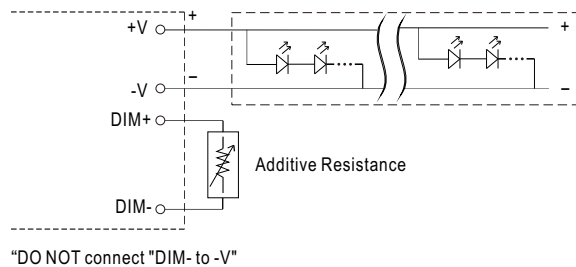


Note : 1. Min. dimming level is about 6% and the output current is not defined when 0% < I_{out} < 6%.

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.


■ OUTPUT LOAD vs TEMPERATURE

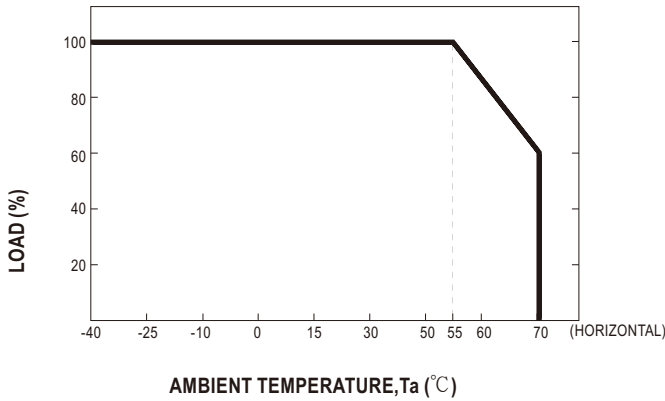

◎ If HLG-600H operates in constant current mode with the rated current, the maximum workable T_a is 55°C.

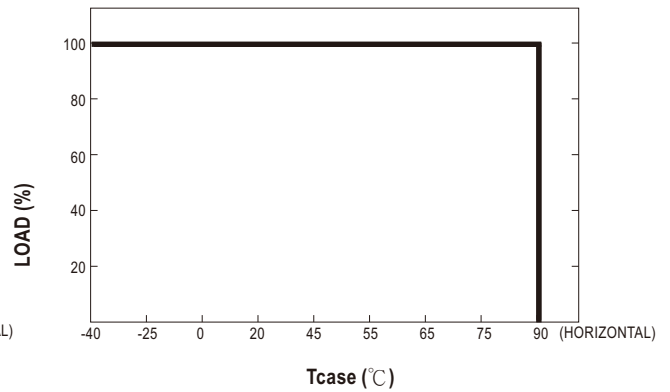


■ STATIC CHARACTERISTICS

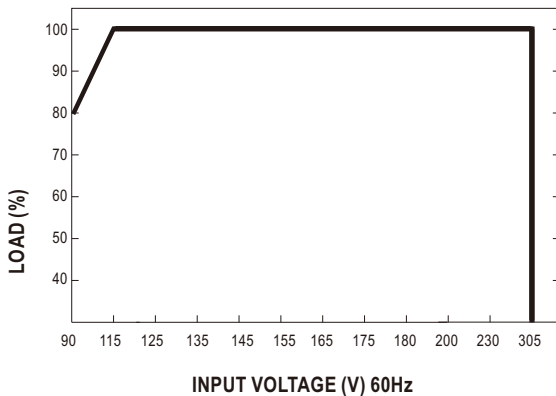

※ De-rating is needed under low input voltage.


■ POWER FACTOR(PF) CHARACTERISTIC

※ T_{case} at 80°C

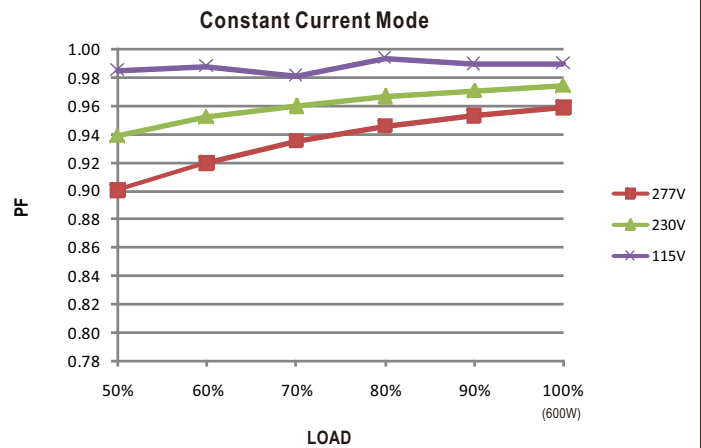

■ TOTAL HARMONIC DISTORTION (THD)


※ 48V Model, T_{case} at 80°C

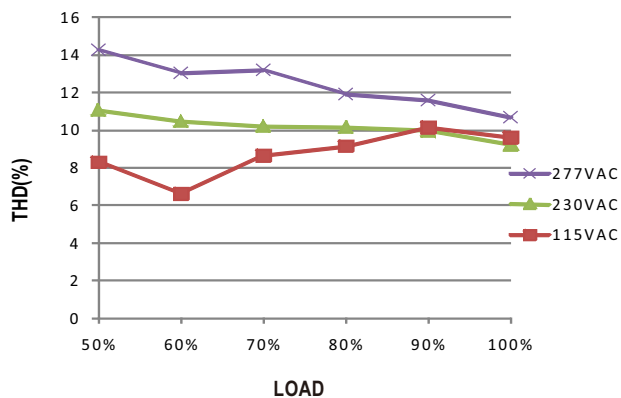

■ EFFICIENCY vs LOAD

HLG-600H series possess superior working efficiency that up to 96% can be reached in field applications.

※ 48V Model, T_{case} at 80°C

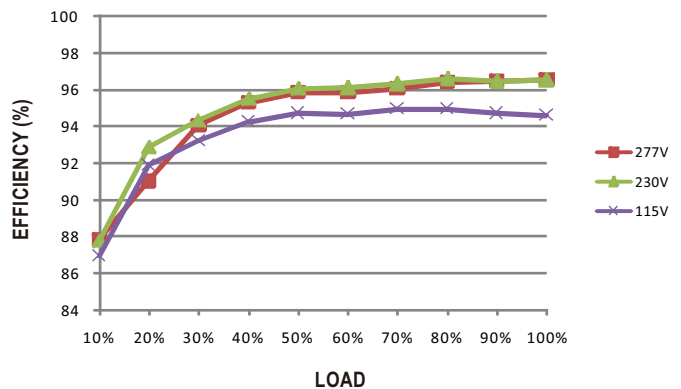




600W Constant Voltage + Constant Current LED Driver

HLG-600H series

■ LIFETIME

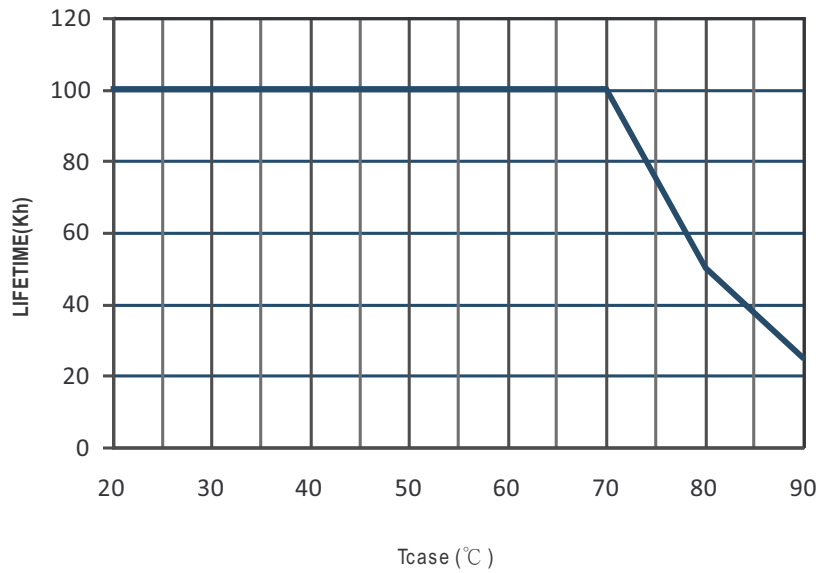


Case No. 228 Unit:mm


The drawing shows the mechanical specifications of the LED module. The top view includes dimensions for the overall size (280mm width, 144mm height) and mounting hole positions (13.4mm, 8.9mm, 15mm). The side view shows the module's profile with a height of 48.5mm and a mounting tab width of 25±2mm. Electrical connections are detailed on the right, including AC input (SJO 17AWG×3C), case temperature measurement point (T case (tc)), and LED output wires (UL2517 22AWG×3C, UL2517 18AWG×2C, SJTW 14AWG×2C) with their respective color codes (RC+, RC-, GND, +5Vss, DIM+, DIM-, -V, +V).

• (tc) : Max. Case Temperature

※AB-Type

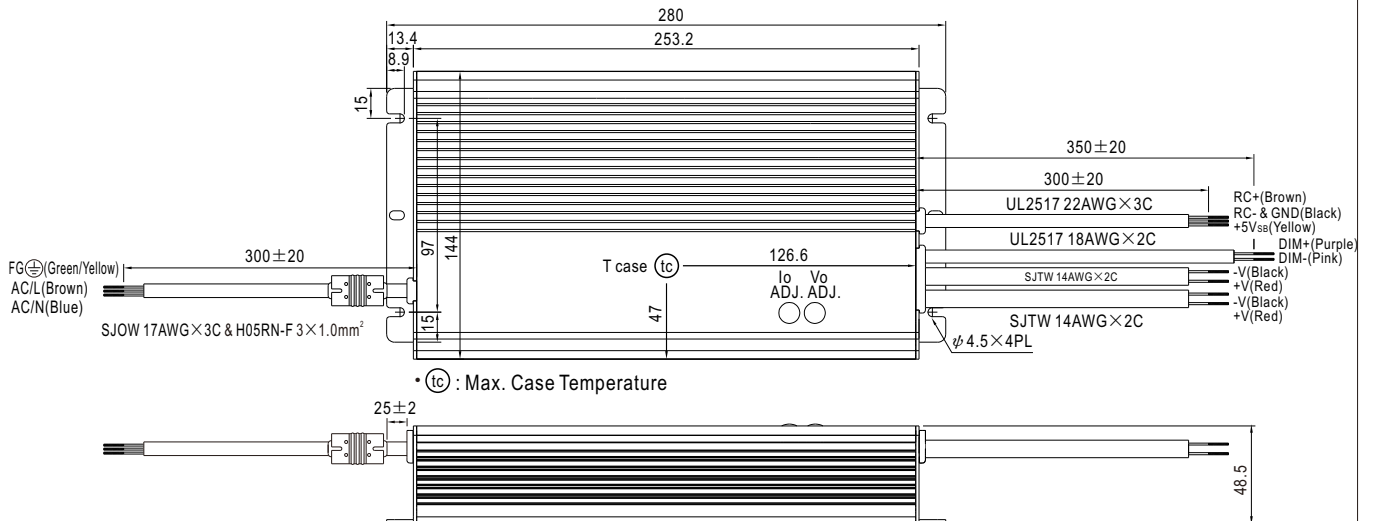

※Blank-Type

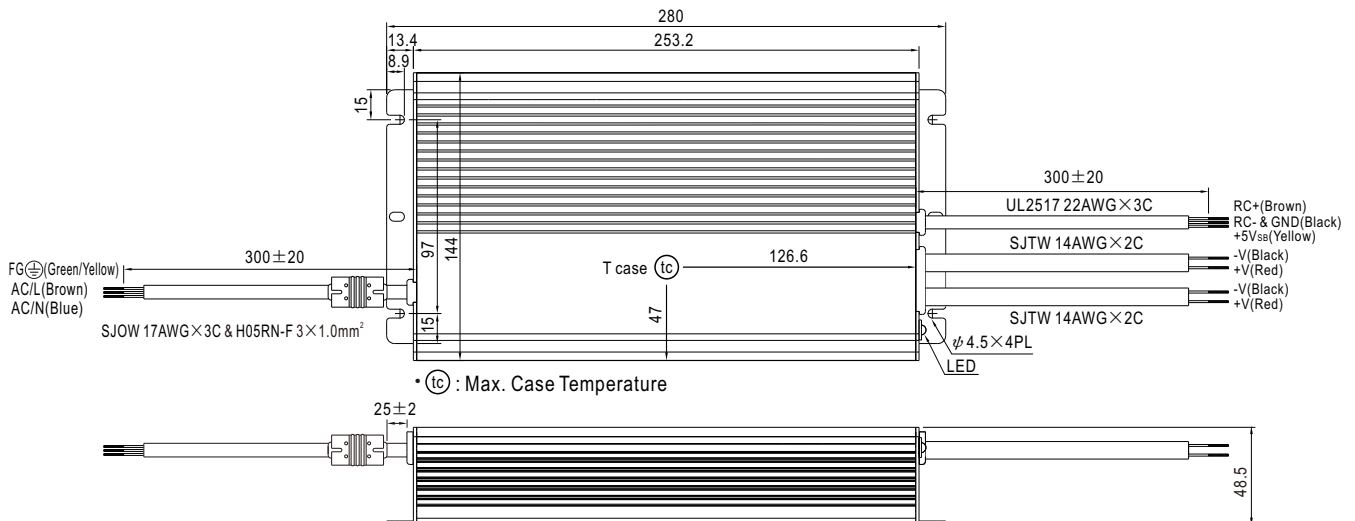

■ INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>