



circuit breaker 3VA2 IEC frame 630 breaking capacity class H  
Icu=85kA @ 415V 3-pole, line protection ETU850, LSI, In=400A  
overload protection Ir=160A...400A short-circuit protection  
Isd=0.6..10x In, li=1.5..15x In N conductor protection optionally with  
external current transformer, up to 160% nut keeper kit

| Model                                          |                             |
|------------------------------------------------|-----------------------------|
| product brand name                             | SETRON                      |
| product designation                            | Molded case circuit breaker |
| Product version                                | Line protection             |
| design of the overcurrent release              | ETU850                      |
| protection function of the overcurrent release | LSI                         |
| number of poles                                | 3                           |

| General technical data                                                                         |        |
|------------------------------------------------------------------------------------------------|--------|
| Tension assignée d'isolement Ui                                                                | 800 V  |
| Max. rated operational voltage Ue with AC 50/60Hz                                              | 690 V  |
| power loss [W] / maximum                                                                       | 63.3 W |
| Active power loss / for rated value of the current / at AC / in hot operating state / per pole | 21.1 W |
| mechanical service life (switching cycles) / typical                                           | 15 000 |
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz                      | 4 000  |
| Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz                          | 4 000  |
| Neutral conductors / upgradeable/retrofittable                                                 | Yes    |

|                                 |         |
|---------------------------------|---------|
| ground fault monitoring version | Without |
| product function                |         |
| • communication function        | Yes     |
| • other measurement function    | Yes     |
| net weight                      | 4.3 kg  |

#### Current

|                                                  |       |
|--------------------------------------------------|-------|
| Max. rated operational current of the frame size | 630 A |
| Courant permanent assigné lu                     | 400 A |
| short-time withstand current (I <sub>cw</sub> )  |       |
| • at AC / limited to 0.5 s / rated value         | 5 kA  |
| • limited to 1 s                                 | 5 kA  |
| operating current                                |       |
| • at 40 °C                                       | 400 A |
| • at 45 °C                                       | 400 A |
| • at 50 °C                                       | 400 A |
| • at 55 °C                                       | 388 A |
| • at 60 °C                                       | 380 A |
| • at 65 °C                                       | 368 A |
| • at 70 °C                                       | 352 A |

#### Switching capacity according to IEC 60947

|                                                                        |        |
|------------------------------------------------------------------------|--------|
| switching capacity class of the circuit breaker                        | H      |
| maximum short-circuit current breaking capacity (I <sub>cu</sub> )     |        |
| • at 240 V                                                             | 110 kA |
| • at 415 V                                                             | 85 kA  |
| • at 440 V                                                             | 85 kA  |
| • at 500 V                                                             | 55 kA  |
| • at 690 V                                                             | 6 kA   |
| operational short-circuit current breaking capacity (I <sub>cs</sub> ) |        |
| • at 240 V                                                             | 110 kA |
| • at 415 V                                                             | 85 kA  |
| • at 440 V                                                             | 85 kA  |
| • at 500 V                                                             | 55 kA  |
| • at 690 V                                                             | 6 kA   |
| short-circuit current making capacity (I <sub>cm</sub> )               |        |
| • at 240 V                                                             | 242 kA |
| • at 415 V                                                             | 187 kA |
| • at 690 V                                                             | 9 kA   |

#### Adjustable parameters

|                                                         |       |
|---------------------------------------------------------|-------|
| Adjustable response value current / I <sub>g</sub> min. | 160 A |
| Adjustable response value current / I <sub>g</sub> min. | 400 A |

|                                                                         |         |
|-------------------------------------------------------------------------|---------|
| Adjustable response value current / I <sub>g</sub> min.                 | 0.5     |
| Adjustable response value current / I <sub>g</sub> min.                 | 25      |
| Adjustable response value current / I <sub>g</sub> min.                 | 240 A   |
| Adjustable response value current / I <sub>g</sub> min.                 | 4 000 A |
| Short-term delayed / tripping switchable / I <sub>2t</sub> =ON/OFF      | Yes     |
| Adjustable response value current / I <sub>g</sub> min.                 | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                 | 0.5 s   |
| Adjustable response value current / I <sub>g</sub> min.                 | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                 | 0.5 s   |
| Adjustable response value current / I <sub>i</sub> min.                 | 600 A   |
| Adjustable response value current / I <sub>i</sub> max.                 | 6 000 A |
| Ground fault protection / tripping switchable / I <sub>2t</sub> =ON/OFF | No      |

## Mechanical Design

|             |        |
|-------------|--------|
| height [in] | 9.8 in |
| Height      | 248 mm |
| width [in]  | 5.4 in |
| Width       | 138 mm |
| depth [in]  | 4.3 in |
| depth       | 110 mm |

## Connections

|                                                                                         |                              |
|-----------------------------------------------------------------------------------------|------------------------------|
| arrangement of electrical connectors / for main current circuit                         | Front terminal               |
| type of electrical connection / for main current circuit                                | on both sides nut keeper kit |
| Type of connectable conductor cross-section, connection screw, width x thickness , min. | 20 x 1 mm                    |
| Type of connectable conductor cross-section, connection screw, width x thickness , max. | 35 x 10 mm                   |

## Auxiliary circuit

|                                                |   |
|------------------------------------------------|---|
| number of CO contacts / for auxiliary contacts | 0 |
|------------------------------------------------|---|

## Accessories

|                                            |     |
|--------------------------------------------|-----|
| product extension / optional / motor drive | Yes |
|--------------------------------------------|-----|

## Environmental conditions

|                                    |        |
|------------------------------------|--------|
| protection class IP / on the front | IP40   |
| ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

## Certificates

| General Product Approval | EMC | Declaration of Conformity |
|--------------------------|-----|---------------------------|
|--------------------------|-----|---------------------------|



CCC



VDE

[Miscellaneous](#)

RCM



EG-Konf.

| Test Certificates | Shipping Approval |
|-------------------|-------------------|
|-------------------|-------------------|

[Miscellaneous](#)[Special Test Certificate](#)[Type Test Certificates/Test Report](#)

ABS

BUREAU  
VERITAS

LRS

| Shipping Approval | other |
|-------------------|-------|
|-------------------|-------|








RMRS

[CCS / China Classification Society](#)[Manufacturer Declaration](#)[Miscellaneous](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2440-6KP32-0AA0>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3VA2440-6KP32-0AA0>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2440-6KP32-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2440-6KP32-0AA0)**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**<http://www.siemens.com/specifications>

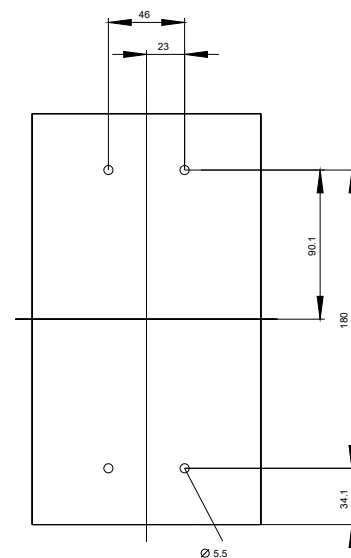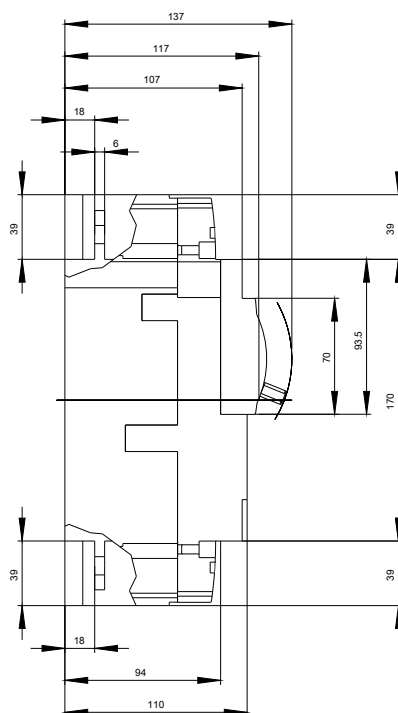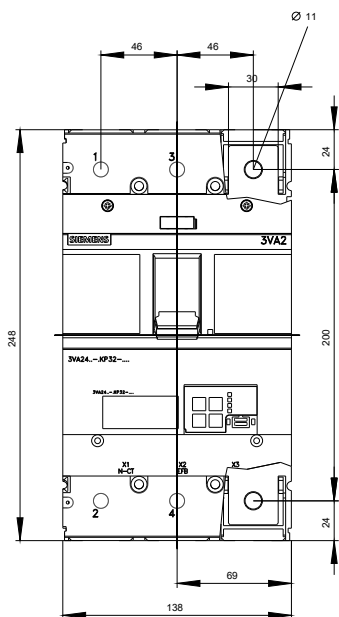

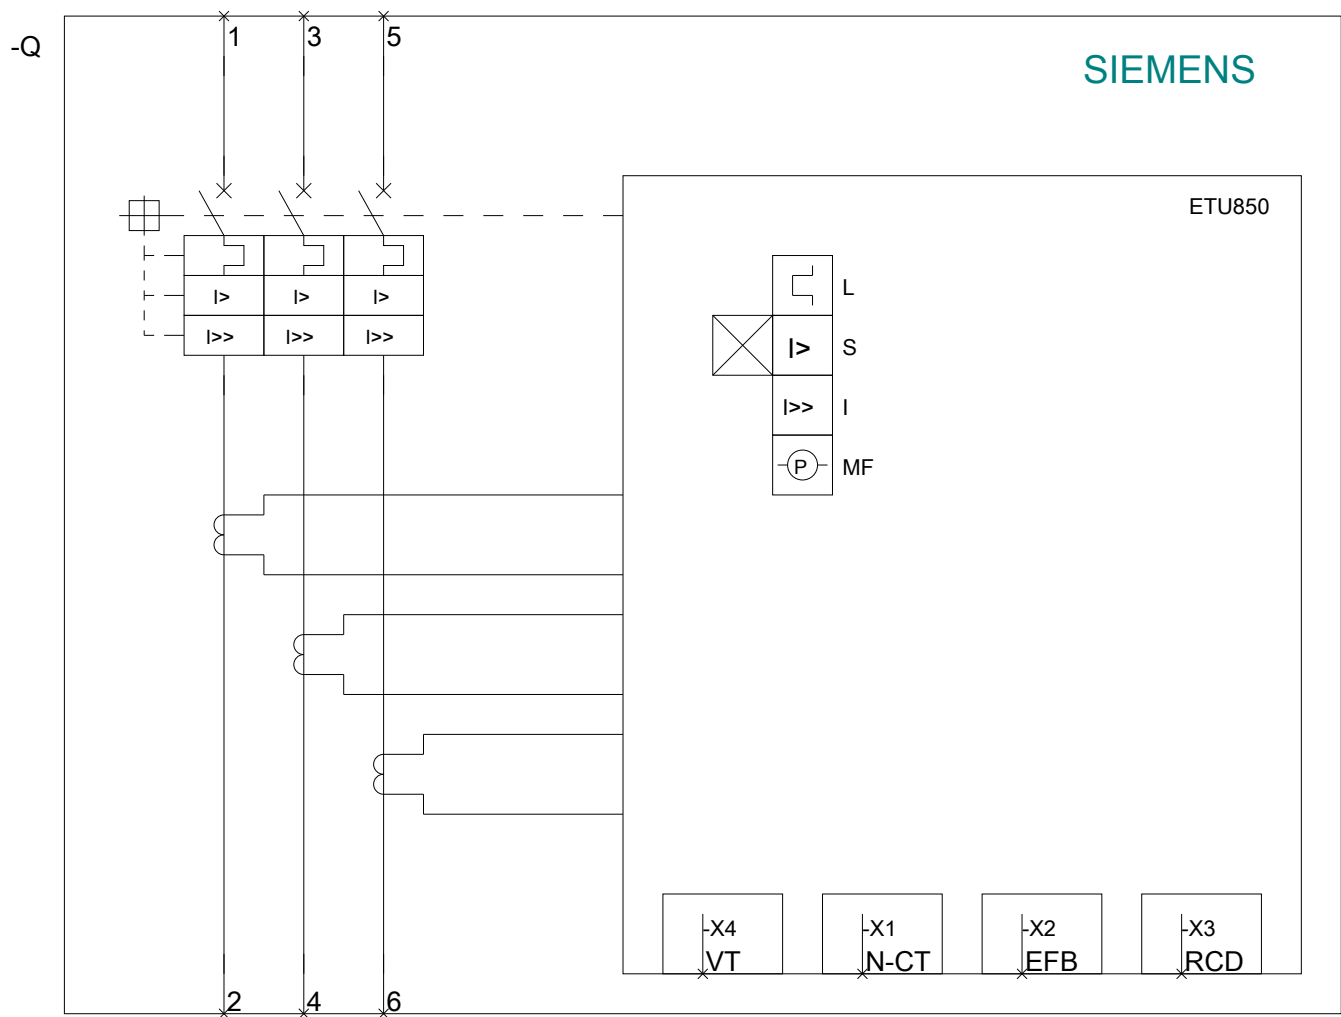

last modified:

10/30/2020