

time-delay device fixed delay 24V DC accessory for: 3VA
undervoltage release



Model	
Product brand name	SENTRON
Product designation	Accessories
Product version	Time-delay device
Accessories	Time-delay device
General technical data	
Off-delay time / minimum	100 ms
Voltage	
Control supply voltage (Us) / at DC	24 V
Mechanical Design	
Height	57.5 mm
Width	44.8 mm
Depth	72.3 mm
Net weight	117 g
Tightening torque / with screw-type terminals / minimum	0.8 N·m
Tightening torque / with screw-type terminals / maximum	1.2 N·m

Connections according IEC

Wire stripping length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16

Connections according UL

Wire stripping length [in]	0.4 in
Tightening torque [lbf-in] / with screw-type terminals / minimum	7.1 lbf-in
Tightening torque [lbf-in] / with screw-type terminals / maximum	10.6 lbf-in

Certificates

General Product Approval		EMC	Declaration of Conformity	Test Certificates	
 VDE	Miscellaneous		 RCM	 EG-Konf.	Type Test Certificates/Test Report

Shipping Approval	other
 LRS	Manufacturer Declaration Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BF23>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BF23>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BF23

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

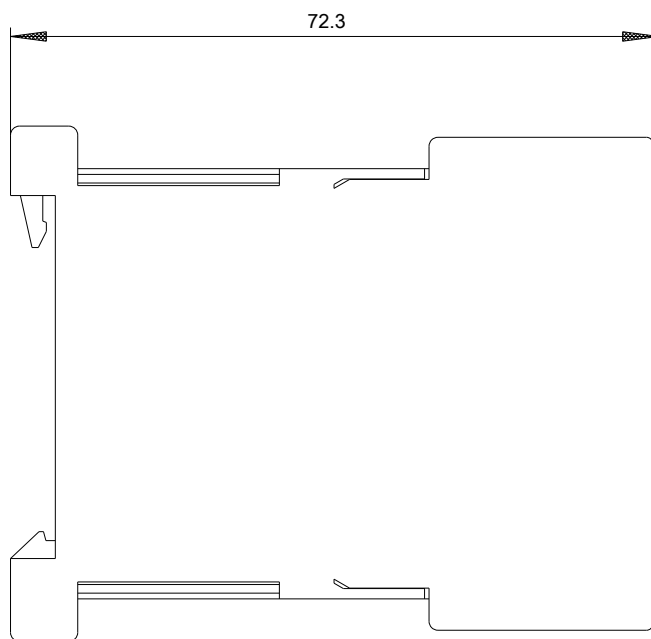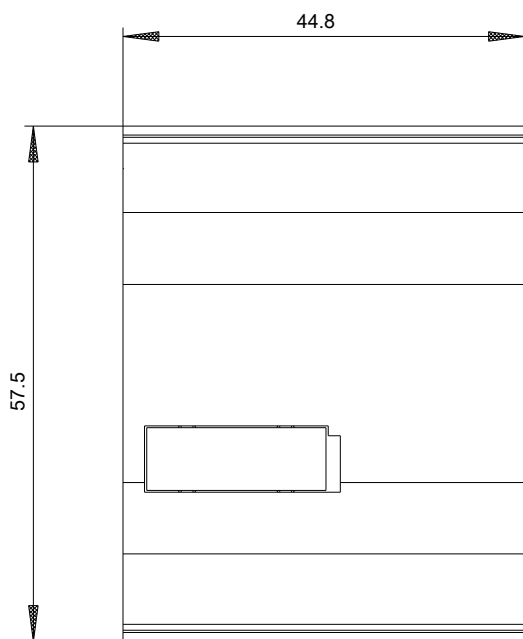

last modified:

08/08/2020