


side mounted motor operator 24-60V DC accessory for: 3VA1 160

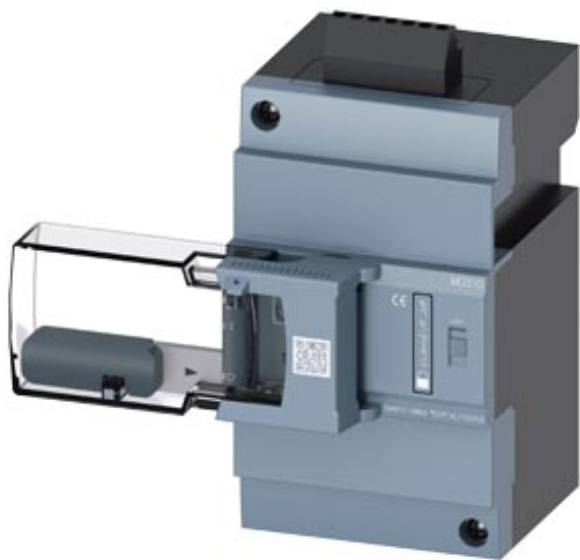

Model	
Product brand name	SENTRON
Product designation	Accessories
Product version	Lateral motorized operating mechanism
Voltage	
Type de tension pour la commande	AC/DC
• Rated control supply voltage Us at AC 50 Hz	42 V
• Rated control supply voltage Us at AC 50 Hz	60 V
• Rated control supply voltage Us at AC 60 Hz	42 V
• Rated control supply voltage Us at AC 60 Hz	60 V
Rated operational power	250 V·A
Mechanical Design	
Rated control supply voltage Us with DC	24 V
Height	149 mm
Width	78.3 mm
Depth	93.8 mm
Connectable conductor cross-section / solid	
• minimum	1.5 mm²

• maximum	2.5 mm ²
Connectable conductor cross-section / finely stranded / with core end processing	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
Connectable conductor cross-section / stranded	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
Ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
Ambient temperature / during storage	
	-40 ... +80
Tightening torque	
• minimum	0.36 N·m
• maximum	0.44 N·m

Connections according IEC

Wire stripping length	7 mm
-----------------------	------

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates
 VDE		 EG-Konf.	Type Test Certificates/Test Report

Shipping Approval	other
 LRS	Manufacturer Declaration Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9117-0HB10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3VA9117-0HB10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9117-0HB10

CAX-Online-Generator

<http://www.siemens.com/cax>

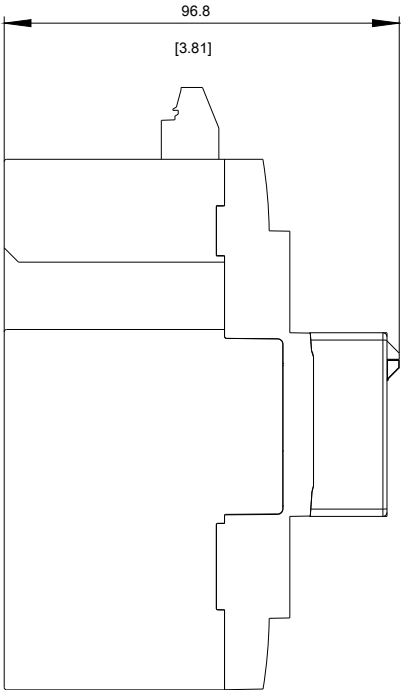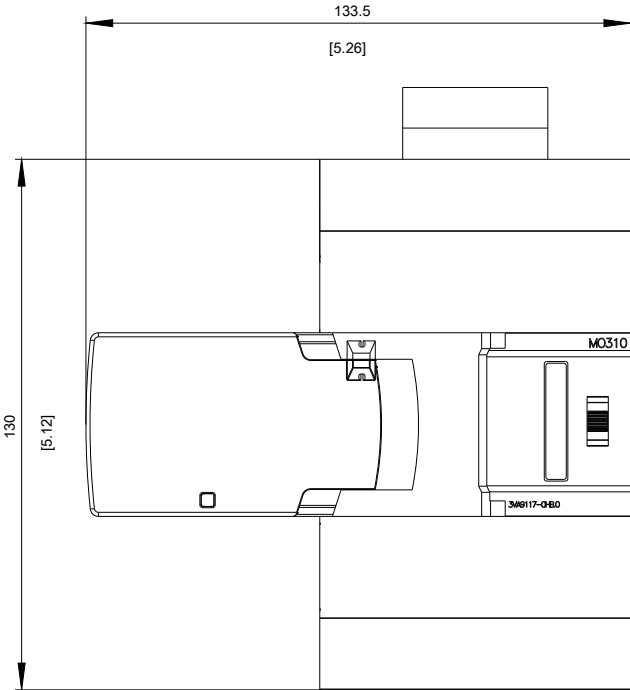

last modified:

08/08/2020