

wire connector CU with control wire voltage tap-off 3 units accessory
for: 3VA4/5 125



Model	
Product brand name	SETRON
Product designation	accessories
Product version	circular conductor terminal
Accessories	Wire connector
General technical data	
Designation / of the terminal	TC1.0
Connections according IEC	
IEC-marking / of terminals	1.5-10 CU NNL
Wire stripping length	12.2
Connections according UL	
UL-marking / of terminals	TC1.0 CMC 14-8 CU9 UR CSA
Permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
Connectable conductor cross-section	

- for copper cable / solid / minimum
- for copper cable / solid / maximum
- for copper cable / stranded / minimum
- for copper cable / stranded / maximum
- for copper cable / finely stranded / minimum
- for copper cable / finely stranded / maximum

14
10
14
8
14
8

Tightening torque / when using copper cables

- stranded
- finely stranded

14 AWG: 20 lb-in
12 AWG: 35 lb-in
10 - 8 AWG: 55 lb-in
14 AWG: 20 lb-in
12 AWG: 35 lb-in
10 - 8 AWG: 55 lb-in

Certificates

General Product Approval

EMC

Declaration of Conformity

Shipping Ap- proval



[Miscellaneous](#)



LRS

other

[Manufacturer De-
claration](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9133-0JK10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9133-0JK10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9133-0JK10

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

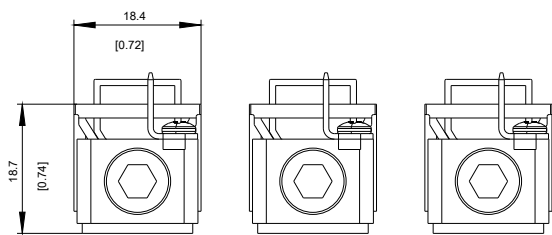

last modified:

08/08/2020