

WIRE CONNECTOR 2 CABLES WITH CONTROL WIRE TAP 3
PCS. ACCESSORY FOR: 3VA15/25 1000



Model	
Product brand name	SETRON
Product designation	accessories
Accessories	Wire connector
General technical data	
Designation / of the terminal	TA3.1
Connections according IEC	
IEC-marking / of terminals	120-300 mm ² CU/AL NNL
Connectable conductor cross-section	• for copper cable / stranded / minimum 120 mm² • for copper cable / stranded / maximum 300 mm² • for aluminum cable / stranded / minimum 120 mm² • for aluminum cable / stranded / maximum 300 mm²
Wire stripping length	26.0 mm
Connections according UL	

UL-marking / of terminals	TA3.1 CMC 4/0-600 CU7AL
Permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
Connectable conductor cross-section • for copper cable / stranded / minimum • for copper cable / stranded / maximum • for copper cable / finely stranded / minimum • for copper cable / finely stranded / maximum • for aluminum cable / stranded / minimum • for aluminum cable / stranded / maximum	4/0 600 4/0 600 4/0 600
Tightening torque / when using copper cables • stranded • finely stranded	4/0 - 600 kcmil: 375 lb-in 4/0 - 600 kcmil: 375 lb-in

Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other
Miscellaneous 	 RCM	 EG-Konf.	 LRS	Manufacturer Declaration

other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9503-0JG23>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9503-0JG23>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)






http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9503-0JG23

Cx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

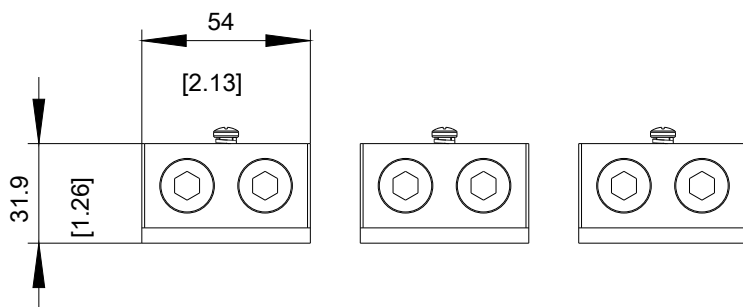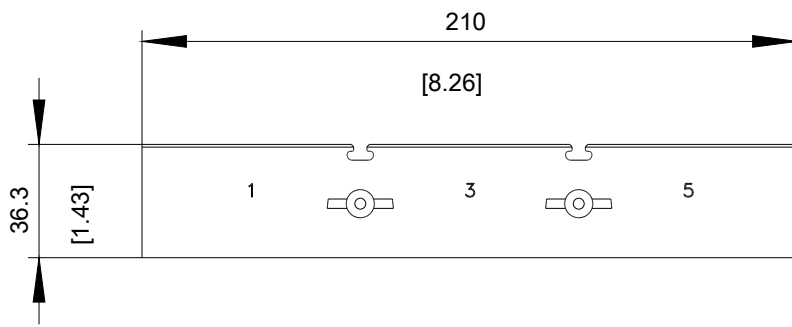

last modified:

08/08/2020