

WIRE CONNECTOR 4 CABLES 4 PCS. ACCESSORY FOR:
3VA15/25 1000



Model	
Product brand name	SETRON
Product designation	accessories
Accessories	Terminal cover
General technical data	
Designation / of the terminal	TA4.3
Connections according IEC	
Connectable conductor cross-section	
• for copper cable / stranded / minimum	120 mm ²
• for copper cable / stranded / maximum	240 mm ²
• for aluminum cable / stranded / minimum	120 mm ²
• for aluminum cable / stranded / maximum	240 mm ²
Wire stripping length	23.1 44.5
Connections according UL	
Permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
Connectable conductor cross-section	

- for copper cable / stranded / minimum
- for copper cable / stranded / maximum
- for copper cable / finely stranded / minimum
- for copper cable / finely stranded / maximum
- for aluminum cable / stranded / minimum
- for aluminum cable / stranded / maximum

4/0

500

4/0

500

4/0

500

Tightening torque / when using copper cables

- stranded
- finely stranded

4/0 - 500 kcmil: 325 lb-in

4/0 - 500 kcmil: 325 lb-in

Certificates




General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other
Miscellaneous 	 RCM	 EG-Konf.	 LRS	Manufacturer Declaration

other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9604-0JJ43>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9604-0JJ43>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9604-0JJ43
CAX-Online-Generator
<http://www.siemens.com/cax>
Tender specifications
<http://www.siemens.com/specifications>

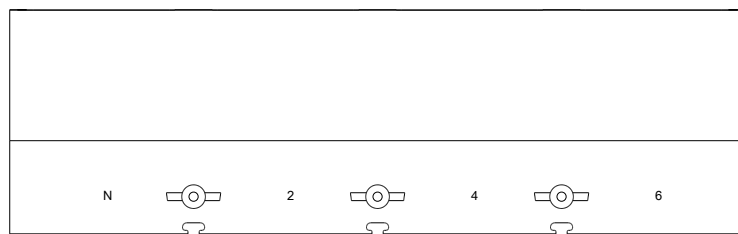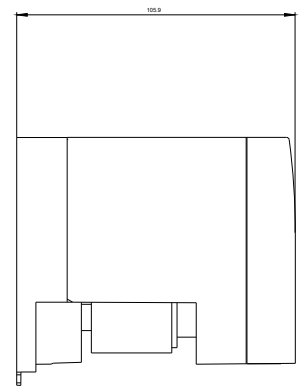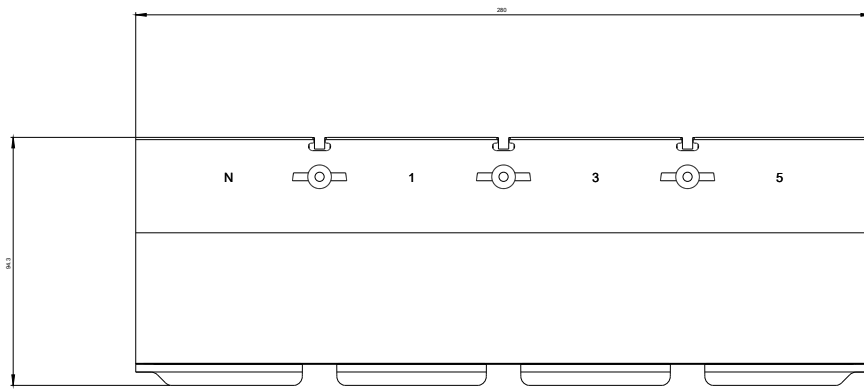

last modified:

08/08/2020