

WIRE CONNECTOR 4 CABLES WITH CONTROL WIRE TAP 3  
PCS. ACCESSORY FOR: 3VA15/25 1000



| Model               |                             |
|---------------------|-----------------------------|
| Product brand name  | SETRON                      |
| Product designation | accessories                 |
| Product version     | circular conductor terminal |
| Accessories         | Wire connector              |

| General technical data        |       |
|-------------------------------|-------|
| Designation / of the terminal | TA4.3 |

| Connections according IEC                 |                     |
|-------------------------------------------|---------------------|
| Connectable conductor cross-section       |                     |
| • for copper cable / stranded / minimum   | 120 mm <sup>2</sup> |
| • for copper cable / stranded / maximum   | 240 mm <sup>2</sup> |
| • for aluminum cable / stranded / minimum | 120 mm <sup>2</sup> |
| • for aluminum cable / stranded / maximum | 240 mm <sup>2</sup> |
| Wire stripping length                     | 23.1<br>44.5        |

| Connections according UL                                                       |       |
|--------------------------------------------------------------------------------|-------|
| Permissible temperature / of connectable conductor / according to UL 486A-486B | 90 °C |

|                                                |                            |
|------------------------------------------------|----------------------------|
| Connectable conductor cross-section            |                            |
| • for copper cable / stranded / minimum        | 4/0                        |
| • for copper cable / stranded / maximum        | 500                        |
| • for copper cable / finely stranded / minimum | 4/0                        |
| • for copper cable / finely stranded / maximum | 500                        |
| • for aluminum cable / stranded / minimum      | 4/0                        |
| • for aluminum cable / stranded / maximum      | 500                        |
| Tightening torque / when using copper cables   |                            |
| • stranded                                     | 4/0 - 500 kcmil: 325 lb-in |
| • finely stranded                              | 4/0 - 500 kcmil: 325 lb-in |

## Certificates

| General Product Approval                                                                                           | EMC                                                                                      | Declaration of Conformity                                                                     | Shipping Approval                                                                          | other                                    |
|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------|
| <a href="#">Miscellaneous</a><br> | <br>RCM | <br>EG-Konf. | <br>LRS | <a href="#">Manufacturer Declaration</a> |

## other

[Miscellaneous](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9603-0JC43>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9603-0JC43>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9603-0JC43](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9603-0JC43)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

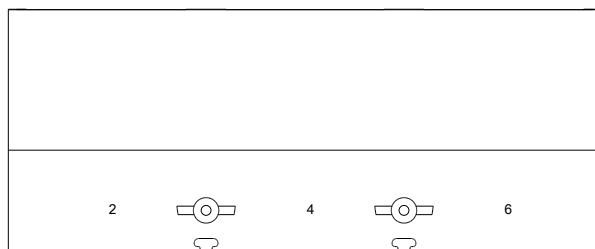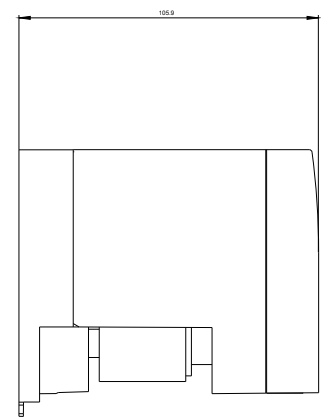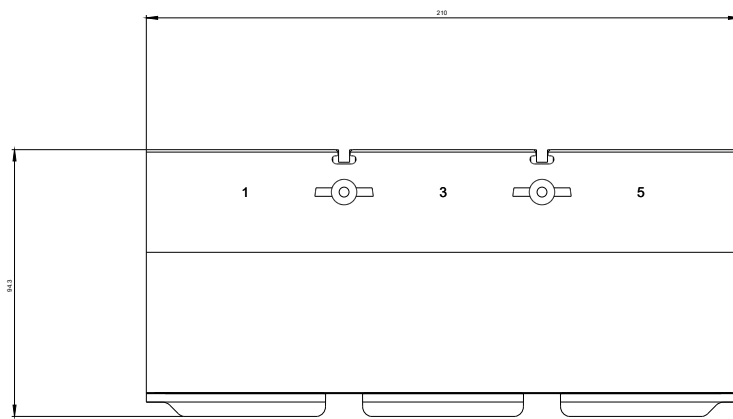

last modified:

08/08/2020