



Hlavní parametry

Řada výrobků	Modicon ETB
Typ produktu nebo součásti	Distribučovaný I/O modul
Pocet vstupních kanálů	1...16 configurable
Pocet výstupních kanálů	1...16 konfigurovatelný
Typ modulu	Modbus TCP/IP

Doplňěk

Typ vstupu	Kontakt
Vstupní logika	Negativní Pozitivní
Zpožděná odezva	2.5 ms
Výstupní proud	2 A na modul 8 A na výstup
Typ výstupní ochrany	Proti zkratu
Spínací frekvence	200 Hz
Zkratový proud	6.5 A
[Us] jmenovité napájecí napětí	24 V DC
Typ konektoru	M12
Standardy	IEC 60529 IEC 60068-2-8

Životní prostředí

stupeň krytí IP	IP67
teplota okolního vzduchu pro provoz	> -25...70 °C
teplota okolí pro uskladnění	> -40...85 °C
odolnost proti vibracím	10 gn


Nabídka udržitelnosti

udržitelný stav nabídky	Výrobek není Green Premium
RoHS	Compliant - since 0923 - Schneider Electric declaration of conformity
dokument o ekologickém profilu	Dostupný

Contractual warranty

Záruční lhůta	18 měsíců
---------------	-----------

Dimensions

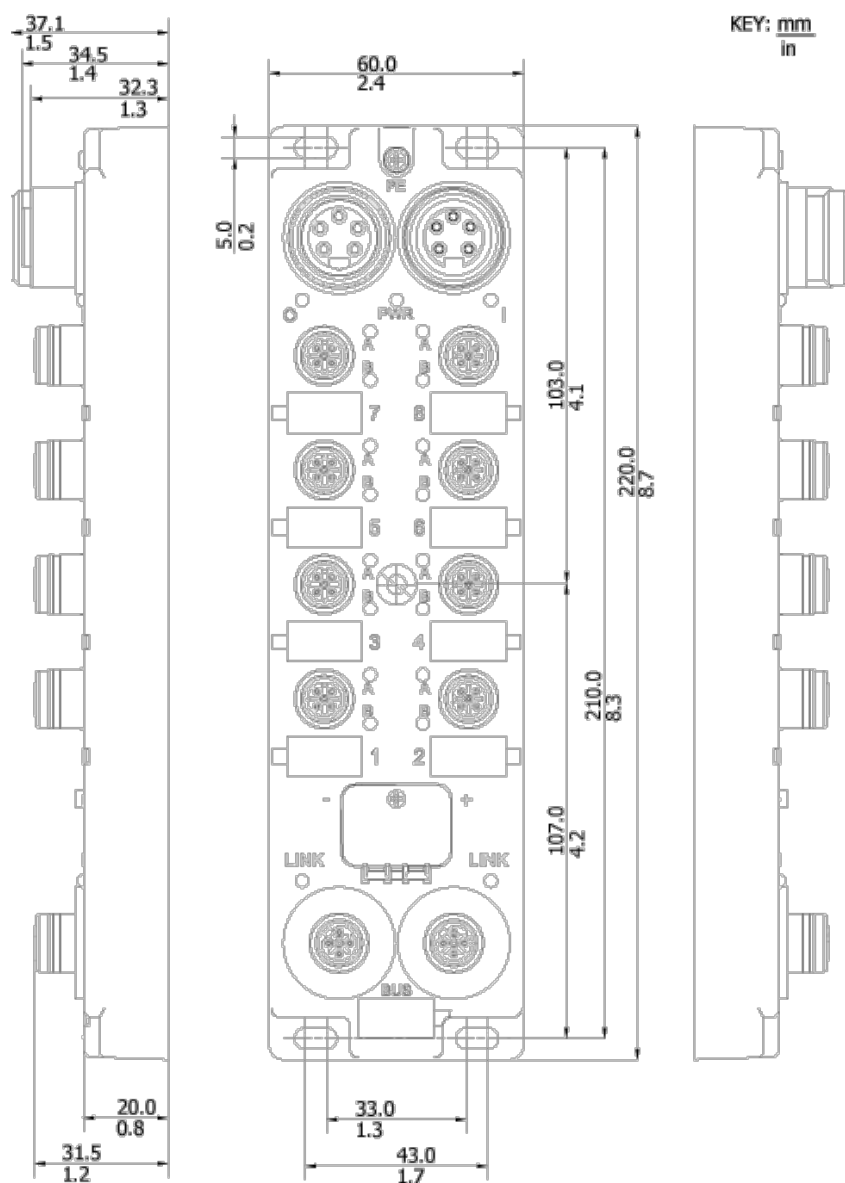


I/O Assignments

Select the number of inputs/outputs according to the product characteristics in order to get the I/O assignment.

8 In 8 Out	12 In 4 Out	16 In	Point	Connector Number		Connector Number	Point	16 In	12 In 4 Out	8 In 8 Out
Out 6	Out 2	In 14	7B 2	Port 7		Port 8	8B 2	In 16	Out 4	Out 8
Out 5	Out 1	In 13	7A 4			Port 8	8A 4	In 15	Out 3	Out 7
Out 2	In 10	In 10	5B 2	Port 5		Port 6	6B 2	In 12	In 12	Out 4
Out 1	In 9	In 9	5A 4			Port 4	6A 4	In 11	In 11	Out 3
In 6	In 6	In 6	3B 2	Port 3		Port 4	4B 2	In 8	In 8	In 8
In 5	In 5	In 5	3A 4			Port 2	4A 4	In 7	In 7	In 7
In 2	In 2	In 2	1B 2	Port 1		Port 2	2B 2	In 4	In 4	In 4
In 1	In 1	In 1	1A 4			Port 2	2A 4	In 3	In 3	In 3


Power Connectors



- 2 module/input power (24V)
- 3 module/input power (0V)
- 4 output power (0V)


2-Output Port

IEC Wiring Diagram with 2 Actuators

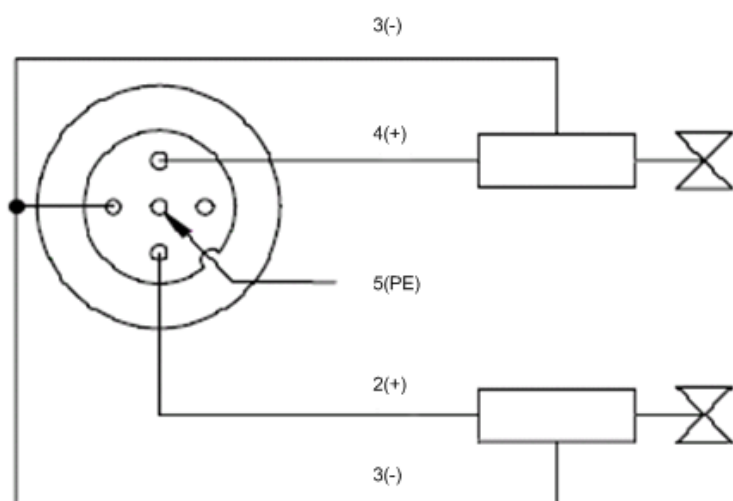

2-Input Port

IEC Wiring Diagram with 2 Sensors

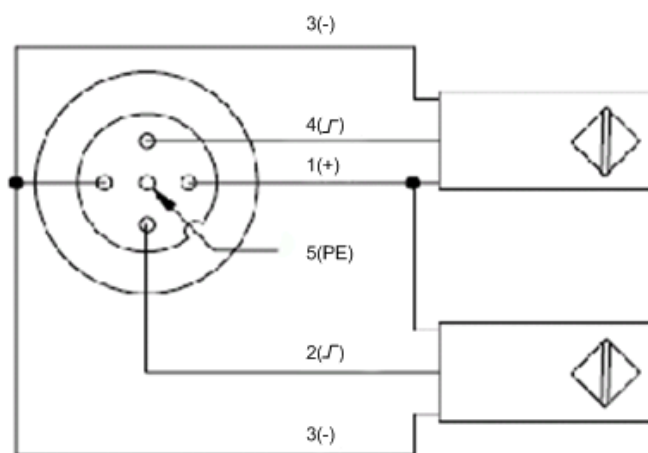

Input/Output Port

IEC Wiring Diagram with 1 Sensor and 1 Actuator

