


Keystone RJ45 socket cat.5e

Cat. no(s): 0 331 80




UTP

CONTENTS	Page
1. General characteristics	1
2. Presentation	1
3. Technical characteristics	1
4. Overall dimensions	1
5. Usual connection of RJ45 sockets	2
6. Standards and approvals	2
7. Performance	3-4

1. GENERAL CHARACTERISTICS

Category 5 RJ45 socket.
Enables high speed data transmission (Gigabit Ethernet).

2. PRESENTATION

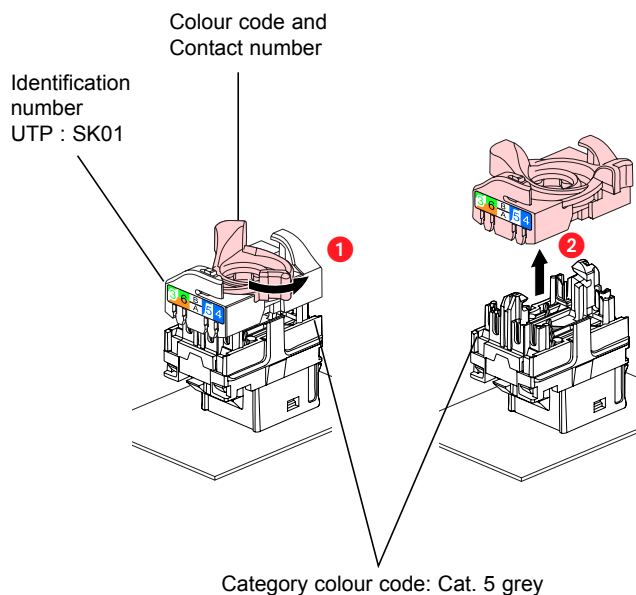

3. TECHNICAL CHARACTERISTICS

3.1 Material characteristics

Contacts: gold/nickel, thickness of gold > 0.8 µm min.
Metal parts: bronze, nickel, platinum, gold
PBT polycarbonate

3.2 Electrical characteristics

Breakdown voltage ≥ 1000 V.
Contact resistance ≤ 20 mΩ.
Insulation resistance ≥ 500 MΩ at 100 V DC.
Compatible remote powering "PoE" up to 100w. (IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt)


3.3 Mechanical characteristics

Max. number of connections and disconnections: 5 without refreshing the cable
Endurance: 2500 movements (plug insertion/withdrawal)
IK03

3.4 Climatic characteristics


Operating temperature: - 40°C to + 70°C
Humid heat cycle 21 days

4. OVERALL DIMENSIONS

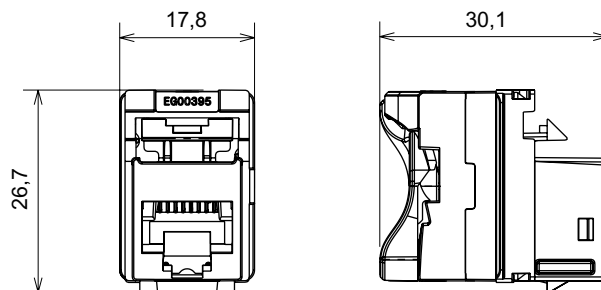


5. USUAL CONNECTION OF RJ45 SOCKETS

Accepts the following cable connectors:
 RJ11 (4 contacts), RJ12 (6 contacts), RJ45 (9 contacts).
 Double colour code EIA - TIA 568 A and B on terminals:
 - UTP 8 contacts

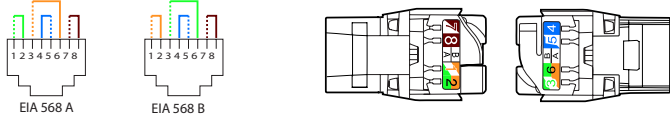


Conductors supported:
 - Single-core/Multicore: 0.4 to 0.65 mm, AWG 26 to 22
 - Polyethylene conductor insulation: Ø 0.85 to 1.7 mm on insulation
 The RJ45 connectors are equipped with a rotating locking system that does not require special tools and enables rewiring in the event of error.

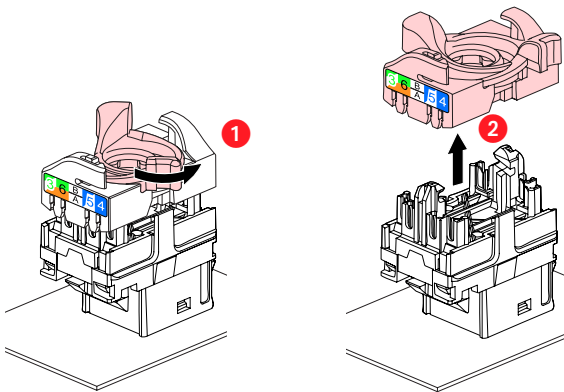

This system allows the wire pairs to be spread easily before attaching them to the connector.

Spreading the wires ensures that pairs are separated by the required 13 mm.
 Spreading the pairs at 90° in relation to the cable ensures the best performance levels.

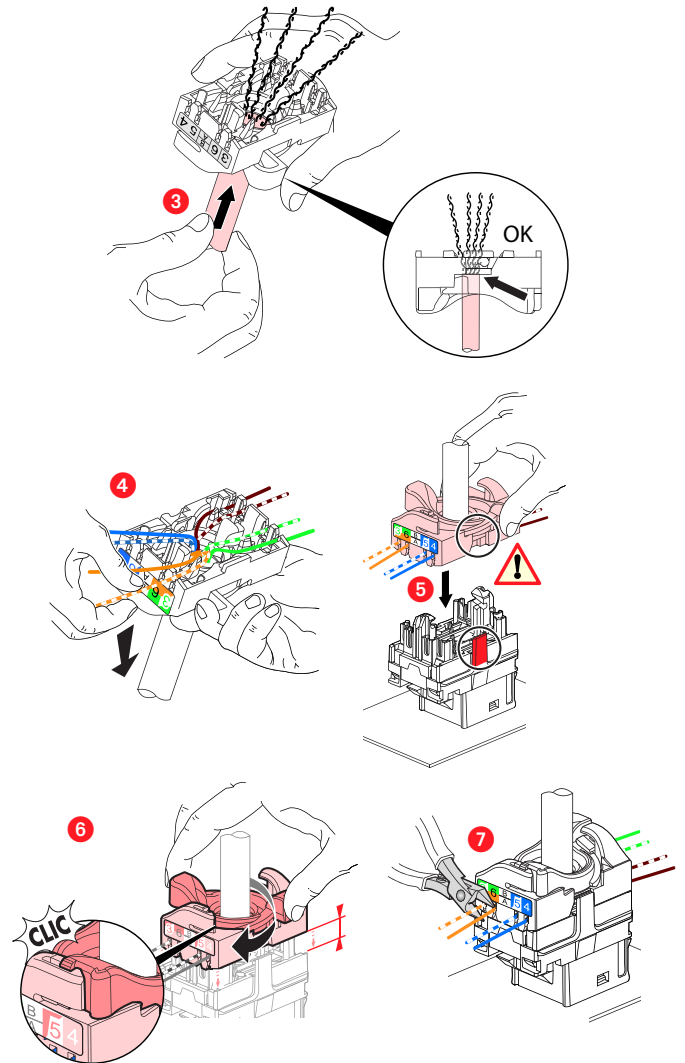


6. STANDARDS AND APPROVALS

Conforms to standards: ISO/IEC 11801 Edition 2
 CENELEC EN 50173-1 2007
 ANSI/TIA 568.2-C
 IEC series 60603-7
 IEEE 802.3bt : PoE++


7. PERFORMANCE

7.1 Performance of components (RJ 45 connectors)


Return loss

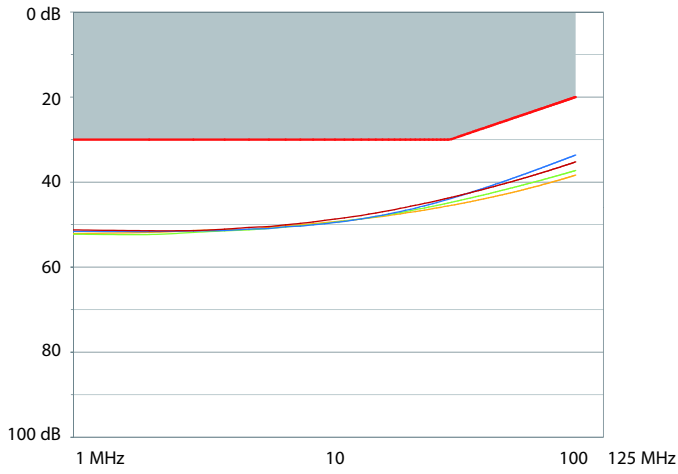

Attenuation

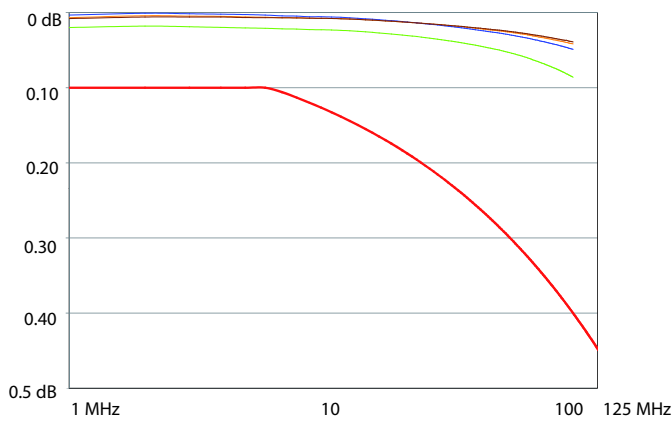


NEXT (Near end Crosstalk Attenuation)

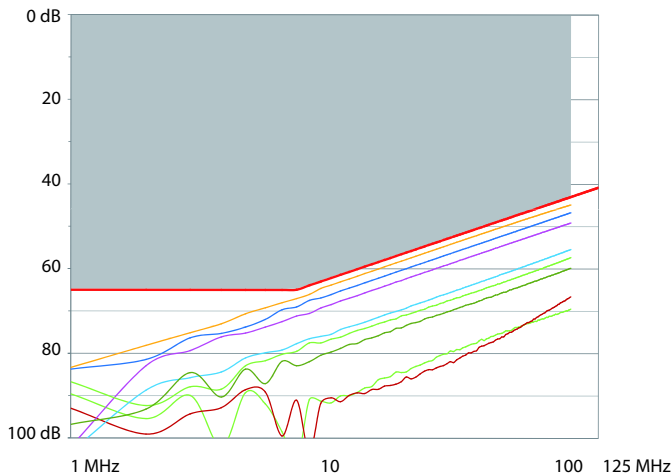

7. PERFORMANCE (continued)


7.1 Performance of components (RJ 45 connectors) (continued)

FEXT (Far end Crosstalk Attenuation)

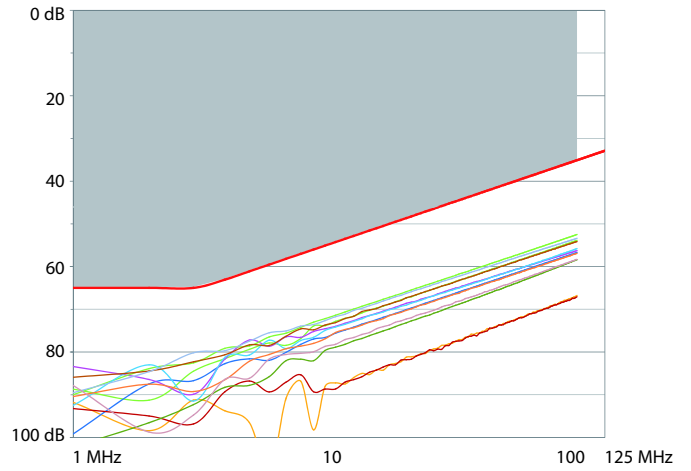


7.2 Performance of permanent link with F/UTP cable

Return loss

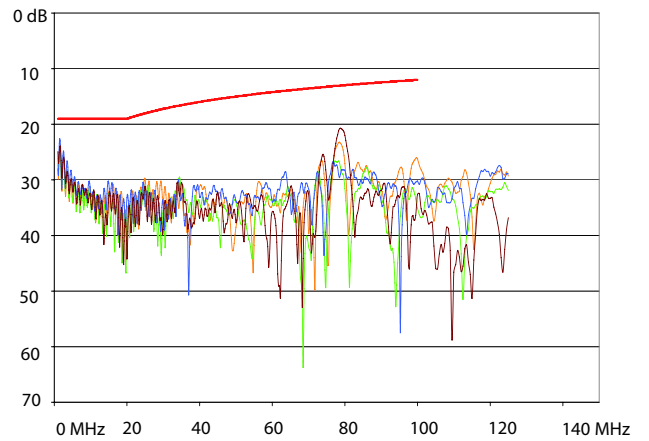


Attenuation

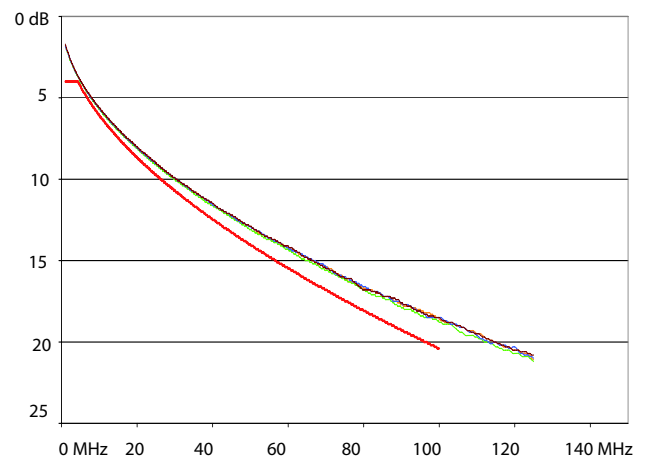


7. PERFORMANCE (continued)

7.2 Performance of permanent link with F/UTP cable (continued)
NEXT (Near end Crosstalk Attenuation)

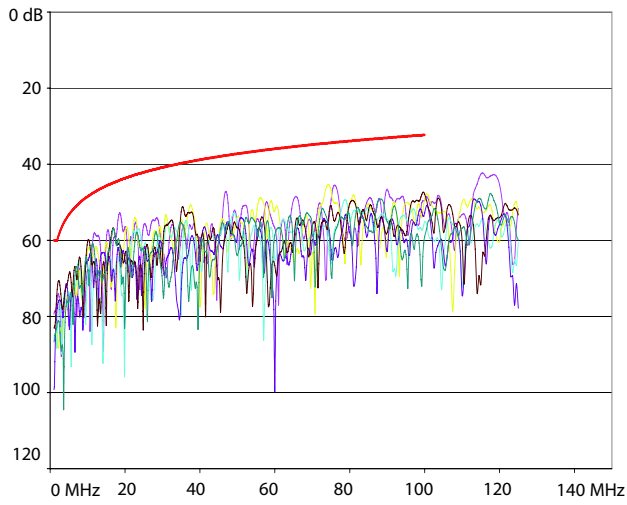


7. PERFORMANCE (continued)

7.2 Performance of permanent link with F/UTP cable (continued)
ELFEXT (Equal Level Far End Crosstalk Attenuation)

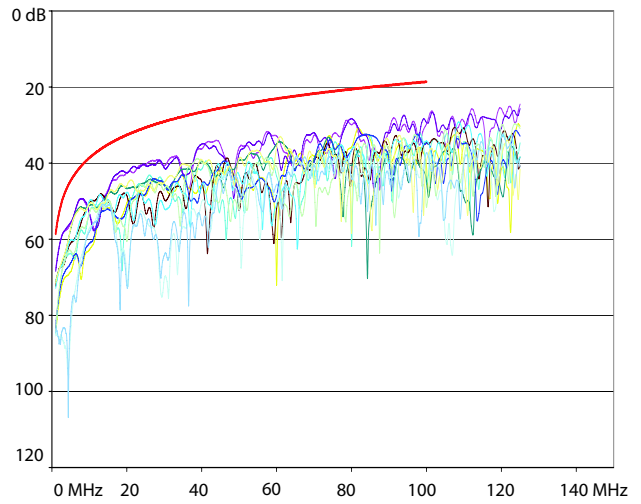

PS NEXT (Power Sum NEXT)

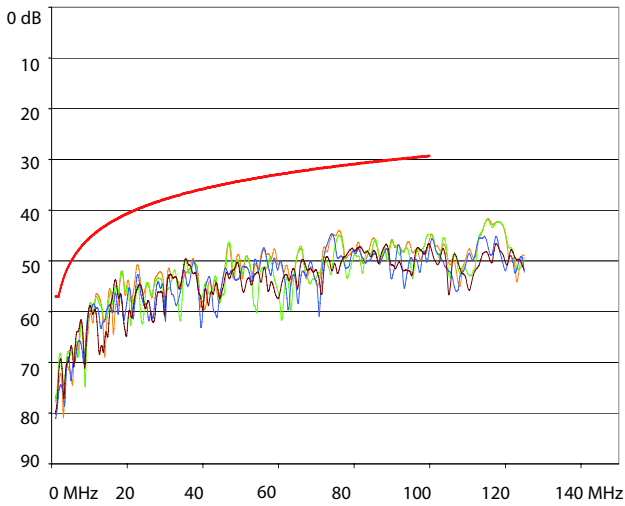

ACR (Attenuation to Crosstalk Ratio)

