

TA 100/25 Support anchor 33170

CE 6/2022

Areas of application:

For the chased fixing of sheathed cables, flexible tubing and conduits, on and under plasterboard.

Installation Guide:

- Drill a 6mm Ø hole
- Insert the TA in the drill-hole
- Click the TB onto the TA
- Put flexible pipes under the TB
- Push the TB tight with your thumb
- Cut the end points of the TB to the desired size

Product details:

Colour	light grey
Content pack/box	100 / 2.400
Shaft length in mm	100
Dowel length in mm	25

Mounting and usage instructions:

The TB is fixed to the TA support anchor. Several TBs can be fixed to one TA. The fixing of the TBs can be done in several stages.

Product benefits/properties:


The TB provides a secure hold even with different conduits/cables dimensions. Fast cable placement with no plastering.

Technical data:

Material	PA 6, UV stabilised Temperature range: -20 °C up to +85 °C silicon-free halogen-free
Weight per piece	3,00 g
Max. recd. load	for TA 100/25: 147.6 N concrete, 146.08 N solid brick, 149.6 N hollow brick, 59.24 N aerated concrete
Breaking load	TA 100/25: 369 N (36.9 kg) concrete, 365.2 N (36.5) solid brick, 374 N (37 kg) hollow brick, 148.1 N (14.8 kg) aerated concrete
GTIN (EAN)	9 008439 431700



With the TA in two sizes, Schnabl has in combination with the TB a system for all requirements - on or under plasterboard

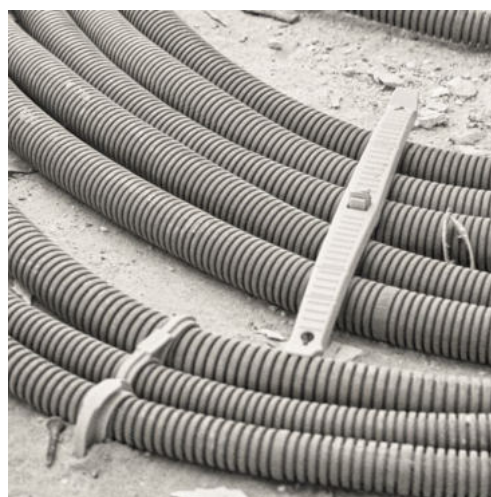

Schnabl Stecktechnik GmbH, Bahnhofplatz 1, po box 63, 3100 St. Pölten, Austria
Telephone +43 2742 22167-0. office@schnabl.works. www.schnabl.works

