

### ELIA AL - Accent LED



ELIA AL is a flush-mounting LED device for accent lighting in commercial areas and offices, composed of a white powder-coated die-cast aluminium frame and 2 different optics (36° and 60°) that guarantee a UGR of less than 19. The range is available in two sizes, with a colour temperature of 3,000K (warm white) or 4,000K (neutral white), a colour rendering index of more than 80 or more than 90 and the option of an electronic power supply with On/Off or DALI command. This modular flush-mounting solution features a rotosymmetrical optic equipped with a passive heat removal system, in die-cast aluminium. Installation is quick and easy, thanks to the reduced weight of the device, the bayonet coupling and the simple wiring, with the connector located on the device and remote power supply included.

#### GENERAL INFORMATION

|                                  |                                |
|----------------------------------|--------------------------------|
| Context                          | Illuminazione di interni       |
| Luminaire                        | LED luminaire for accentuation |
| Application                      | Internal                       |
| Unique digital code (Datamatrix) | Currently not present          |

|                      |                          |
|----------------------|--------------------------|
| Colour               | White                    |
| Type of light source | LED                      |
| System power         | 25 W                     |
| LED Lifetime         | L80B50 (Tq25°) = 50.000h |
| Weight (kg)          | 0.7                      |

|                       |           |
|-----------------------|-----------|
| Warranty              | 5 years   |
| Stocking temperature  | -20° +65° |
| Operating temperature | -20° +45° |

#### MATERIALS

|             |                               |
|-------------|-------------------------------|
| Body        | Die-cast aluminium            |
| Shield type | -                             |
| Optic       | Riflettore ad alta efficienza |

|                |                |
|----------------|----------------|
| Gasket         | -              |
| Locking Hook   | -              |
| External screw | -              |
| Colour         | Powder coating |

#### STANDARDS AND APPROVALS

|                                         |             |
|-----------------------------------------|-------------|
| Classification                          | -           |
| Device with reduced surface temperature | -           |
| DIN 18032-3 certification               | -           |
| IPEA                                    | -           |
| Insulation class                        | II          |
| IP degree                               | IP40 - IP54 |
| Mechanical resistance                   | IK06        |
| Glow Wire Test                          | 850 °C      |

#### OPTIC AND ILLUMINATING FEATURES

|                                    |                                                  |
|------------------------------------|--------------------------------------------------|
| Optic                              | 60°                                              |
| Unified Glare Rating               | UGR<19                                           |
| Lumen output (lm)                  | 2800                                             |
| Efficiency (lm/W)                  | 112                                              |
| Colour temperature                 | 4000 K                                           |
| Color Rendering Index              | CRI 80                                           |
| Standard Deviation Colour Matching | SDCM = 3                                         |
| Photobiological Risk Class         | RG0                                              |
| Standard                           | EN 60598-1; EN 60598-2-2; IEC/TR 62778; EN 62493 |


#### ELETRICAL AND LIGHTING FEATURES

|                        |                           |
|------------------------|---------------------------|
| Supply voltage         | 220-240 V                 |
| Rated frequency (Hz)   | 50 / 60                   |
| Driver                 | Esterno - Incluso         |
| Driver failure rate    | F025 (Tq=25°C) = 50.000 h |
| Overvoltage protection | DM 1 kV                   |
| Control System         | ON / OFF                  |


#### INSTALLATION AND MAINTENANCE

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| Mounting and installation           | For flush-mounting                      |
| Tilt                                | -                                       |
| Wiring                              | With connection terminal on driver      |
| Fixing                              | Tramite molle integrate all'apparecchio |
| Light source replaceability         | Non-replaceable                         |
| Controlgear replaceability          | By professional                         |
| Driver Box                          | -                                       |
| Maximum surface exposed to the wind | -                                       |

### DIMENSIONAL

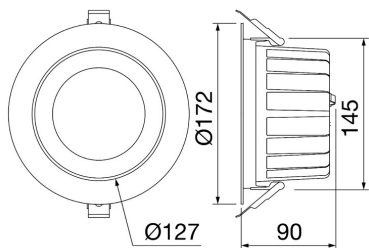

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IP

IP40 - IP54

IK

IK06

GWT

850 °C

### STANDARDS/APPROVALS

Data, measures, designs and pictures are for information purpose only, last update 29/10/2022. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website [www.gewiss.com](http://www.gewiss.com). Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>. - 1 of 2

