


RGS 60

Kabelrinne, gelocht, schwer, Höhe = 60 mm Fluchtweginstallation

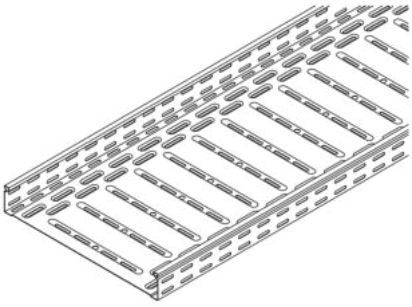

Sendzimir-feuerverzinkt, nach DIN EN 10346

Artikel	Breite	Höhe	Länge	Q_{SK}	t	A	Gewicht
RGS 60-10S	100 mm	60 mm	3000 mm	0,09 kN/m	1,5 mm	57 cm ²	8,333 kg
RGS 60-20S	200 mm	60 mm	3000 mm	0,18 kN/m	1,5 mm	117 cm ²	11,332 kg
RGS 60-30S	300 mm	60 mm	3000 mm	0,27 kN/m	1,5 mm	177 cm ²	14,64 kg
RGS 60-40S	400 mm	60 mm	3000 mm	0,36 kN/m	1,5 mm	237 cm ²	17,948 kg
RGS 60-50S	500 mm	60 mm	3000 mm	0,45 kN/m	1,5 mm	297 cm ²	21,257 kg
RGS 60-60S	600 mm	60 mm	3000 mm	0,54 kN/m	1,5 mm	357 cm ²	24,565 kg

Q_{SK} : Streckenlast Steuerkabel

t: Materialstärke

A: Querschnittsfläche

Gewicht: Gewicht je Lagermeneinheit

DETAIL- UND ANWENDUNGSBILDER



