
































	System lumen (lm)	CCT (K)	Driver	P (W)	Ø mm	kg
DN145B LED6S	650			6.5	68-73	0.11
DN145B LED10S	1100			11	152-157	0.28
DN145B LED20S	2100	3000/4000	PSU	21	203-208	0.45
DN145C LED10S	1100	-		11	=	0.75
DN145C LED20S	2100			21	-	1.10

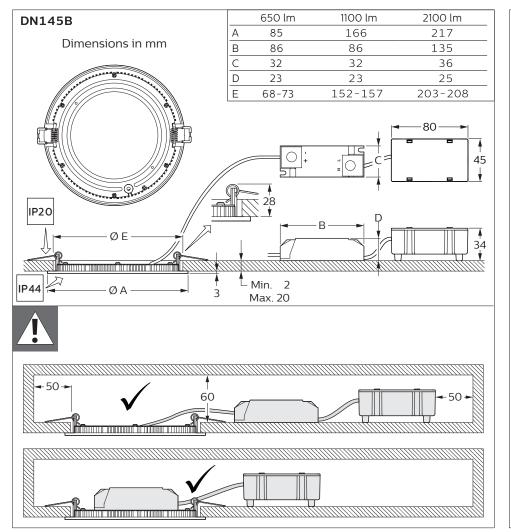


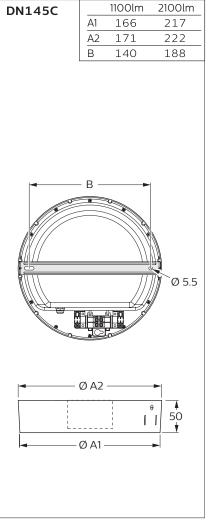


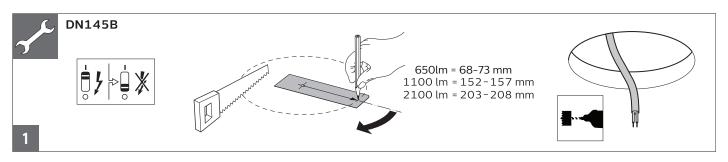


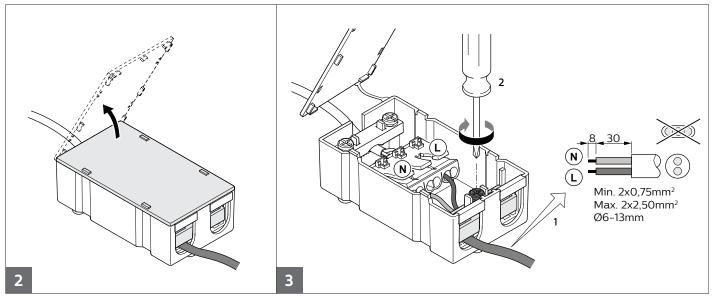


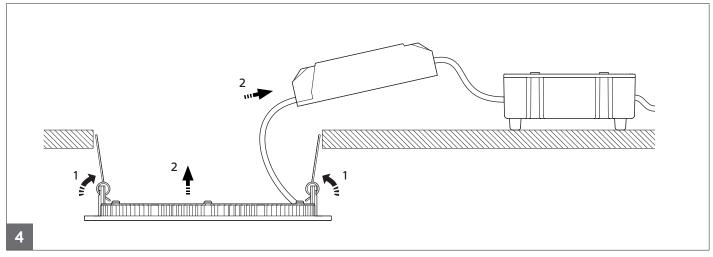


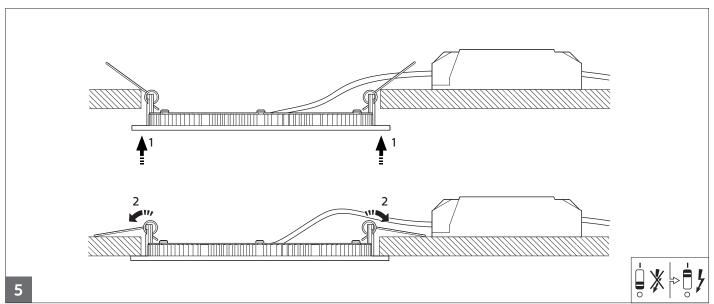

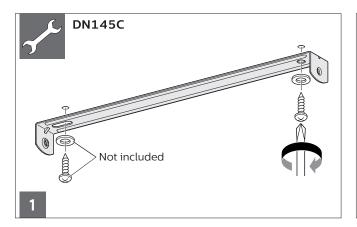

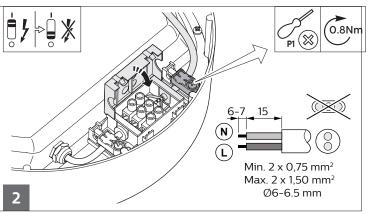



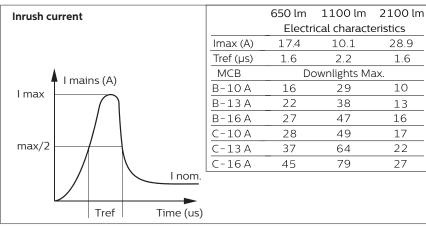



- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements
- The light source of this luminaire is not replaceable; when the light source reaches its end
- of life the whole luminaire shall be replaced
- ATTENTION
 OBSERVE PRECAUTIONS
 FOR HANDLING
 ELECTROSTATIC
 SENSITIVE
 DEVICES DN145B version is IP20 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void



© 2019 Signify Holding.

All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding. The Netherlands