



Biała obudowa




Zasilacz w komplecie



Uchwyty montażowe




brak efektu migotania

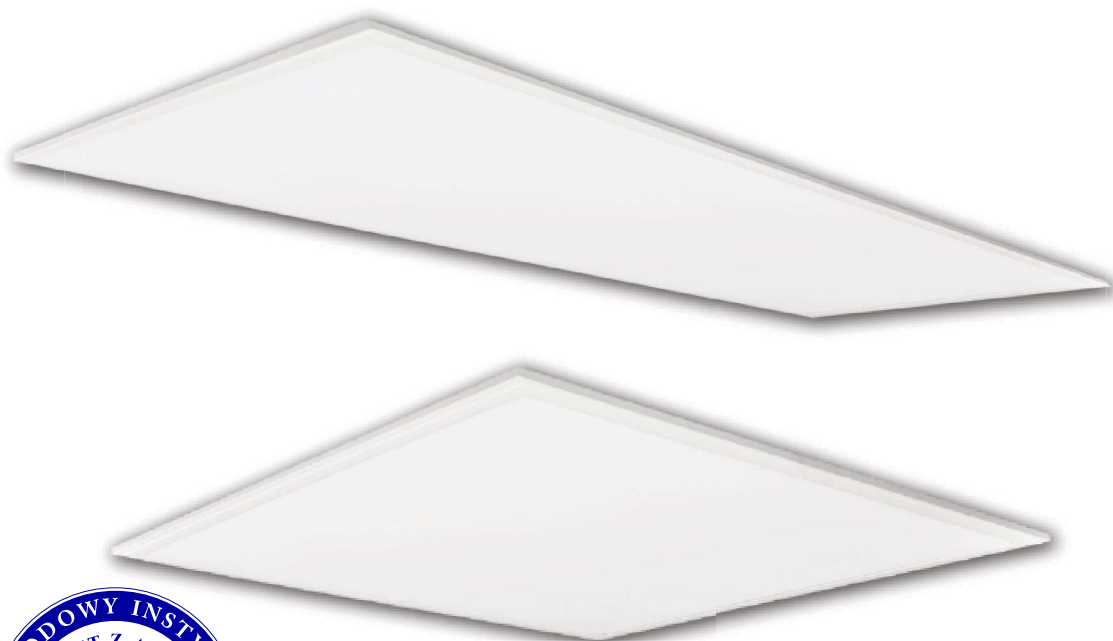


kod	EAN	opakowanie	barwa światła [K]	moc [W]	strumień świetlny [lm]
C71-PLM-066-400-4K-WH	5900280923448	1/5	4000	40	4100
C71-PLM-066-400-6K-WH	5900280926500	1/5	6000	40	4200
C71-PLM-123-400-4K-WH	5900280926524	1/5	4000	40	4100
C71-PLM-123-400-6K-WH	5900280926517	1/5	6000	40	4200


► PLM-066

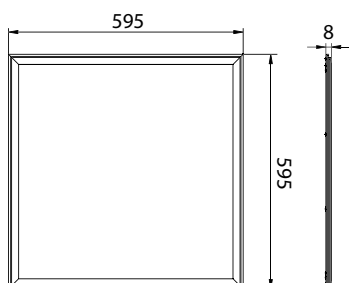

► PLM-123

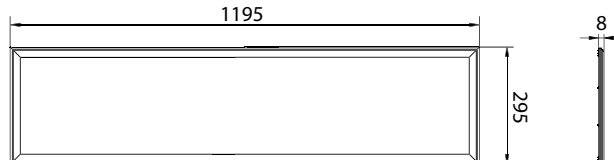

Zeskanuj kod QR aby uzyskać więcej informacji o tym produkcie



## + IP44

Możliwość rozszerzenia stopnia szczelności do IP44 (IP44 optional)

## + UA

Możliwość montażu zewnętrznego układu awaryjnego (compatible with external emergency module)

