

Description

Electronic unit for D.C. power supply of fluorescent lamps. Easy install within ceiling light fittings, it supplies them in the event of a power failure.

Maximum recharging time

24 hours



LED indicating the presence of power supply and activation of the recharge circuit

Operating temperature

ta 0 to 40°C

Rated voltage

230V

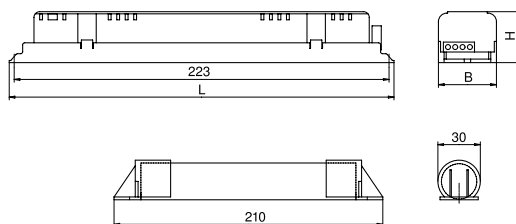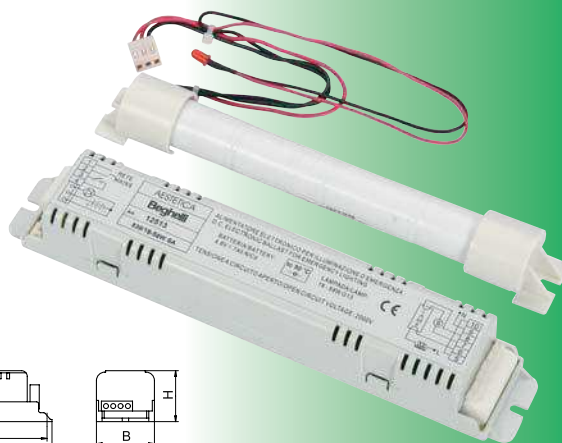

Ordering code	Destripción	Duration	Packaging	Battery	LxBxH (mm)	kg
12513	839/18-58W SA	1-2h	12pcs	NiCd 4,8V 1,7Ah	232x40x36	0,8

Description

Electronic unit for D.C. power supply of fluorescent lamps. Easy install within ceiling light fittings, it supplies them in the event of a power failure.

Maximum recharging time

24 hours



LED indicating the presence of power supply and activation of the recharge circuit

Operating temperature

ta 0 to 40°C

Rated voltage

230V

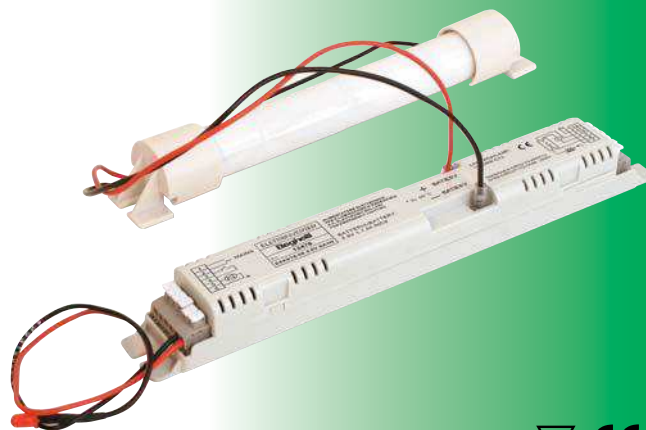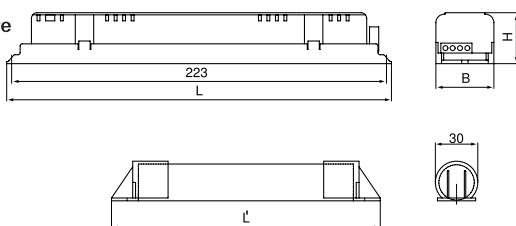

Ordering code	Destripción	Duration	Packaging	Battery	L'/LxBxH (mm)	kg
12480	EL E843/18-58 6V SA1N	1h	12pcs	NiCd6V 4Ah	340x230x30x26	0,7
(T8) 12482	EL E843/18-58 6V SA3N	3h	12pcs	NiCd6V 4Ah	340x230x30x26	0,7
12481	EL E843/18-58 6V SA1N RM	1h	12pcs	NiCd6V 4Ah	340x230x30x26	0,7
12483	EL E843/18-58 6V SA3N RM	3h	12pcs	NiCd6V 4Ah	340x230x30x26	0,7
12488	EL E843/14-24 4.8V SA1N T5	1h	12pcs	NiCd 4,8V 1,7Ah	208x230x30x26	0,3
12490	EL E843/14-28 6V SA3N T5	3h	12pcs	NiCd 6V 4Ah	340x230x30x26	0,7
(T5) 12492	EL E843/28-80 6V SA1N T5	1h	12pcs	NiCd 6V 4Ah	340x230x30x26	0,7
12489	EL E843/14-24 4.8V SA1N T5 RM	1h	12pcs	NiCd 4,8V 1,7Ah	208x230x30x26	0,3
12491	EL E843/14-28 6V SA3N T5 RM	3h	12pcs	NiCd 6V 4Ah	340x230x30x26	0,7
12493	EL E843/28-80 6V SA1N T5 RM	1h	12pcs	Pb 6V 4Ah	340x230x30x26	0,7