


BIS Závitové adaptéry (M/F)

přizpůsobení závitových spojů

(K 55 35)



6473XXX








6473521
6484321

Vlastnosti a výhody

- pro zvětšení či zmenšení závitu vůči závitu
- pozinkováno
- testováno pro požární bezpečnost
- objímky, apod.
- materiál: ocel

Výr. č.	H (mm)	h (mm)	G1	G2	Lm1 (mm)	Lm2 (mm)	SW1 (mm)	M.Bal.	V.Bal.
6473008	19	12	M8	M6	7,0	5,5	13	100	1 000
6473206	20	12	M6	M8	7,0	6,0	13	100	2 000
6473210	23	15	M10	M8	9,0	6,0	13	100	2 000
6473212	23	15	M12	M8	8,0	6,0	17	50	-
6473221	30	22	G1/2	M8	13,0	8,0	27	50	250
6473321	31	21	G1/2	M10	12,0	8,0	27	25	250
6473408	23	13	M8	M12	7,0	7,5	13	50	1 000
6473410	23	13	M10	M12	8,0	7,5	13	50	1 000
6473416	32	22	M16	M12	11,0	8,0	24	50	-
6473510	32	18	M10	M16	9,0	11,0	19	50	-
6473512	32	18	M12	M16	10,0	11,0	19	50	-
6473421	26	11	M10	G1/2	9,0	13,0	27	25	250
6473521	15	-	M16	G1/2	15,0	-	-	50	250
6473621	25	15	G3/4	G1/2	12,0	7,0	-	50	700
6473721	32	20	G1	G1/2	17,0	9,0	-	10	100

Od M10 testováno pro požární bezpečnost.

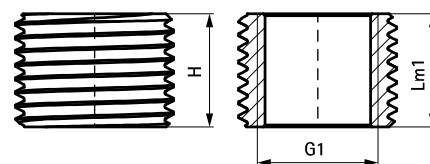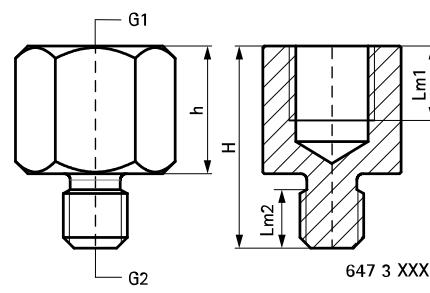

647 3 521 /
648 4 321