



circuit breaker 3VA2 IEC frame 630 breaking capacity class C  
Icu=110kA @ 415V 4-pole, line protection ETU560, LSIG, In=500A  
overload protection Ir=200A...500A short-circuit protection  
I<sub>sd</sub>=0.6..10x I<sub>n</sub>, I<sub>i</sub>=1.5..14x I<sub>n</sub> N conductor protection adjustable  
(OFF, up to 100%) gr.-fault prot., can be sw. off I<sub>g</sub>=0.2...1 x I<sub>n</sub>=  
t<sub>g</sub>=0.05-0.8s nut keeper kit

| Model                                          |                             |
|------------------------------------------------|-----------------------------|
| product brand name                             | SENTRON                     |
| product designation                            | Molded case circuit breaker |
| Product version                                | Line protection             |
| design of the overcurrent release              | ETU560                      |
| protection function of the overcurrent release | LSIG                        |
| number of poles                                | 4                           |

| General technical data                                                                         |        |
|------------------------------------------------------------------------------------------------|--------|
| Tension assignée d'isolement U <sub>i</sub>                                                    | 800 V  |
| Max. rated operational voltage U <sub>e</sub> with AC 50/60Hz                                  | 690 V  |
| power loss [W] / maximum                                                                       | 99 W   |
| Active power loss / for rated value of the current / at AC / in hot operating state / per pole | 33 W   |
| mechanical service life (switching cycles) / typical                                           | 15 000 |
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz                      | 4 000  |
| Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz                          | 4 000  |
| Neutral conductors / upgradeable/retrofitable                                                  | No     |

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| ground fault monitoring version | Summation current formation L + N conductor |
| product function                |                                             |
| • communication function        | Yes                                         |
| • other measurement function    | No                                          |
| net weight                      | 5.7 kg                                      |

#### Current

|                                                  |       |
|--------------------------------------------------|-------|
| Max. rated operational current of the frame size | 630 A |
| Courant permanent assigné lu                     | 500 A |
| short-time withstand current (I <sub>cw</sub> )  |       |
| • at AC / limited to 0.5 s / rated value         | 6 kA  |
| • limited to 1 s                                 | 6 kA  |
| operating current                                |       |
| • at 40 °C                                       | 500 A |
| • at 45 °C                                       | 500 A |
| • at 50 °C                                       | 500 A |
| • at 55 °C                                       | 477 A |
| • at 60 °C                                       | 455 A |
| • at 65 °C                                       | 432 A |
| • at 70 °C                                       | 410 A |

#### Switching capacity according to IEC 60947

|                                                                        |        |
|------------------------------------------------------------------------|--------|
| switching capacity class of the circuit breaker                        | C      |
| maximum short-circuit current breaking capacity (I <sub>cu</sub> )     |        |
| • at 240 V                                                             | 150 kA |
| • at 415 V                                                             | 110 kA |
| • at 440 V                                                             | 110 kA |
| • at 500 V                                                             | 85 kA  |
| • at 690 V                                                             | 6 kA   |
| operational short-circuit current breaking capacity (I <sub>cs</sub> ) |        |
| • at 240 V                                                             | 150 kA |
| • at 415 V                                                             | 110 kA |
| • at 440 V                                                             | 110 kA |
| • at 500 V                                                             | 85 kA  |
| • at 690 V                                                             | 6 kA   |
| short-circuit current making capacity (I <sub>cm</sub> )               |        |
| • at 240 V                                                             | 330 kA |
| • at 415 V                                                             | 242 kA |
| • at 440 V                                                             | 242 kA |
| • at 500 V                                                             | 187 kA |
| • at 690 V                                                             | 9 kA   |

#### Adjustable parameters

|                                                                                                 |         |
|-------------------------------------------------------------------------------------------------|---------|
| Adjustable response value current / I <sub>g</sub> min.                                         | 200 A   |
| Adjustable response value current / I <sub>g</sub> min.                                         | 500 A   |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.5     |
| Adjustable response value current / I <sub>g</sub> min.                                         | 20      |
| Adjustable response value current / I <sub>g</sub> min.                                         | 300 A   |
| Adjustable response value current / I <sub>g</sub> min.                                         | 5 000 A |
| Short-term delayed / tripping switchable / I <sub>2t</sub> =ON/OFF                              | Yes     |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.5 s   |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.5 s   |
| Adjustable response value current / I <sub>i</sub> min.                                         | 750 A   |
| Adjustable response value current / I <sub>i</sub> max.                                         | 7 000 A |
| Ground fault protection can be switched ON/OFF                                                  | Yes     |
| Ground fault protection / tripping switchable / I <sub>2t</sub> =ON/OFF                         | Yes     |
| Adjustable response value current / I <sub>g</sub> min.                                         | 100 A   |
| Adjustable response value current / I <sub>g</sub> max.                                         | 500 A   |
| Adjustable response value current / t <sub>g</sub> min.                                         | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.8 s   |
| Adjustable response value current / for G-tripping / with I <sub>2t</sub> characteristic / min. | 0.2 A   |
| Adjustable response value current / for G-tripping / with I <sub>2t</sub> characteristic / max. | 1 A     |

### Mechanical Design

|             |        |
|-------------|--------|
| height [in] | 9.8 in |
| Height      | 248 mm |
| width [in]  | 7.2 in |
| Width       | 184 mm |
| depth [in]  | 4.3 in |
| depth       | 110 mm |

### Connections

|                                                                                         |                              |
|-----------------------------------------------------------------------------------------|------------------------------|
| arrangement of electrical connectors / for main current circuit                         | Front terminal               |
| type of electrical connection / for main current circuit                                | on both sides nut keeper kit |
| Type of connectable conductor cross-section, connection screw, width x thickness , min. | 20 x 1 mm                    |
| Type of connectable conductor cross-section, connection screw, width x thickness , max. | 35 x 10 mm                   |

### Auxiliary circuit

|                                                |   |
|------------------------------------------------|---|
| number of CO contacts / for auxiliary contacts | 0 |
|------------------------------------------------|---|

### Accessories

|                                            |     |
|--------------------------------------------|-----|
| product extension / optional / motor drive | Yes |
|--------------------------------------------|-----|

## Environmental conditions

|                                    |        |
|------------------------------------|--------|
| protection class IP / on the front | IP40   |
| ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

## Certificates

|                                         |   |
|-----------------------------------------|---|
| reference code / acc. to DIN EN 81346-2 | Q |
|-----------------------------------------|---|

| General Product Approval                                                                        | EMC                                                                                      | Declaration of Conformity     |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------|
| <br>CCC        | <br>VDE | <a href="#">Miscellaneous</a> |
|                |                                                                                          |                               |
| <br>RCM      |                                                                                          |                               |
| <br>EG-Konf. |                                                                                          |                               |

| Test Certificates                                  | Shipping Approval                                                                                      |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <a href="#">Miscellaneous</a>                      | <a href="#">Special Test Certificate</a>                                                               |
| <a href="#">Type Test Certificates/Test Report</a> | <br>ABS              |
|                                                    | <br>BUREAU VERITAS |
|                                                    | <br>LRS            |

| Shipping Approval                                                                           | other                                              |
|---------------------------------------------------------------------------------------------|----------------------------------------------------|
| <br>RMRS | <a href="#">CCS / China Classification Society</a> |
|                                                                                             | <a href="#">Manufacturer Declaration</a>           |
|                                                                                             | <a href="#">Miscellaneous</a>                      |

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2450-7JQ42-0AA0>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<https://support.industry.siemens.com/cs/ww/en/ps/3VA2450-7JQ42-0AA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2450-7JQ42-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2450-7JQ42-0AA0)

**CAX-Online-Generator**  
<http://www.siemens.com/cax>

**Tender specifications**  
<http://www.siemens.com/specifications>



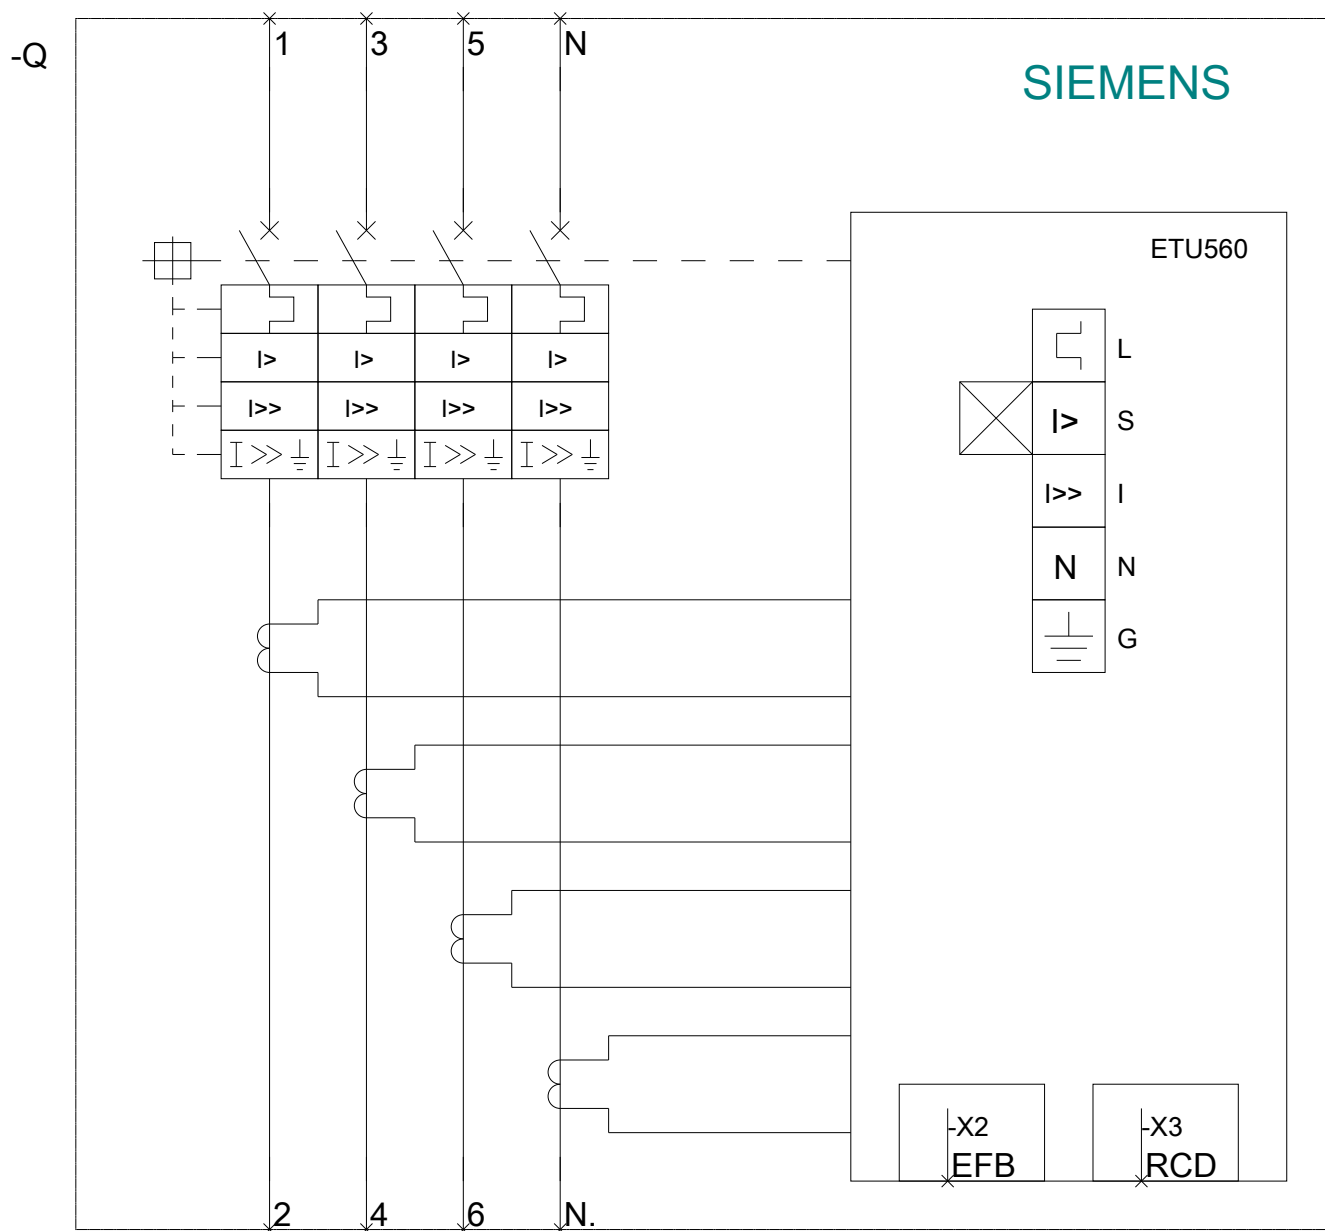

last modified:

10/30/2020