





















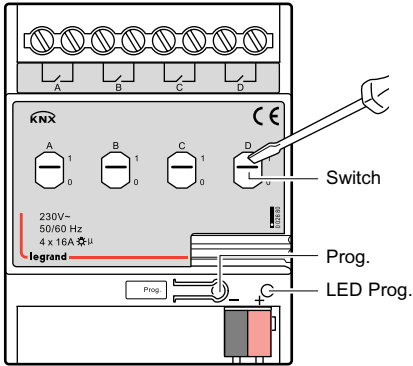

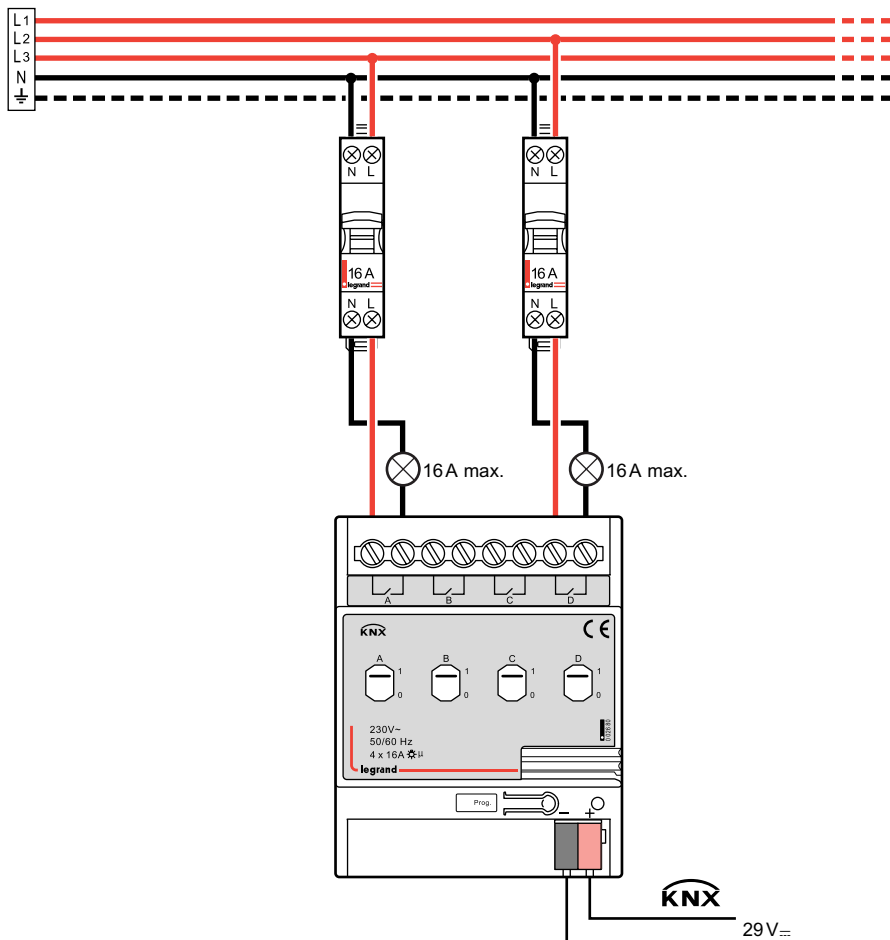
	29 V _~
	12 mA max.
	2 x 2,5 mm ²
	x = 4
	4 x (Ø 0,6 mm <  < Ø 0,8 mm)
	-5°C → +45°C

A - D (4 x 16 A)

								
								
230 V~	3680 W	16 A	1000 VA	4,3 A	1000 VA	4,3 A	10 x (2x36) W	4,3 A

					LED 			
								
230 V~	500 VA	2,1 A	500 VA	2,1 A	500 VA	2,1 A	500 VA	2,1 A





i www.legrandoc.com

