


## **DBX U4 KT BD S 0-180 (922 400)**


- Universal voltage type with actiVsense technology
  - Suitable for wall mounting, IP65
  - For installation in conformity with the lightning protection zone concept at the boundaries from  $0_A - 2$  and higher



Figure without obligation



Basic circuit diagram DBX U4 KT DB S 0-180

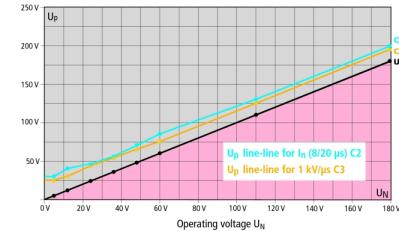

Voltage protection level diagram DBX U4 KT DB S 0-180

Compact combined lightning current and surge arrester in a surface-mounted plastic enclosure with actiVsense technology for protecting two pairs with the same or a different signal voltage of galvanically isolated balanced interfaces. Direct or indirect shield earthing.

Type	DBX U4 KT BD S 0-180
Part No.	922 400
SPD class	<b>TYPE I<sup>1)</sup></b>
Nominal voltage ( $U_N$ )	0-180 V
Frequency of the nominal voltage ( $f_{UN}$ )	0-400 Hz
Max. continuous operating voltage (d.c.) ( $U_C$ )	180 V
Permissible superimposed signal voltage ( $U_{signal}$ )	$\leq +/- 5$ V
Cut-off frequency line-line ( $U_{signal}$ , balanced 100 ohms) ( $f_G$ )	50 MHz
Nominal current $I_L$ (equals max. short-circuit current)	100 mA
D1 Total lightning impulse current (10/350 $\mu$ s) ( $I_{imp}$ )	10 kA
D1 Lightning impulse current (10/350 $\mu$ s) per line ( $I_{imp}$ )	2.5 kA
C2 Total nominal discharge current (8/20 $\mu$ s) ( $I_n$ )	20 kA
C2 Nominal discharge current (8/20 $\mu$ s) per line ( $I_n$ )	10 kA
Voltage protection level line-line for $I_n$ , C2 ( $U_p$ )	see diagram, line C2
Voltage protection level line-line at 1 kV/ $\mu$ s C3 ( $U_p$ )	see diagram, line C3
Voltage protection level line-line for $I_{imp}$ , D1 ( $U_p$ )	$\leq U_N + 50$ V
Voltage protection level line-PG for D1/C2/C3	$\leq 550$ V
Series resistance per line	$\leq 9$ ohms; typically 7.9 ohms
Capacitance line-line (C)	$\leq 80$ pF
Capacitance line-PG (C)	$\leq 70$ pF
Operating temperature range ( $T_U$ )	-25 °C ... +40 °C
Degree of protection	IP 65
Cross-sectional area of the signal lines	0.08-1.5 mm <sup>2</sup>
Cross-sectional area of the earth terminal	2.5-4 mm <sup>2</sup>
Dimensions (L x W x H)	93 x 93 x 55 mm
Enclosure material	polycarbonate
Colour	grey
Test standards	IEC 61643-21 / EN 61643-21
Approvals	EAC
Weight	220 g
Customs tariff number (Comb. Nomenclature EU)	85363010
GTIN	4013364137349
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.