



KS FL40 STTZN (320 044)


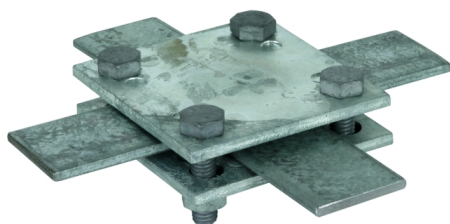


Figure without obligation



| Type | KS FL40 STTZN |
|---|------------------------|
| Part No. | 320 044 |
| Material of clamp | St/tZn |
| Clamping range FI / FI | 30-40 / 30-40 mm |
| Screw | ☒ M8 x 30 mm |
| Material of screw / nut | St/tZn |
| Dimensions | 70 x 70 x 3 mm |
| Lightning current carrying capability (10/350 μs) | ☒ 100 kA ^{*)} |
| Standard | EN 62561-1 |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 12.6 kA |
| Zinc coating acc. EN 1461 | ~50 μm |
| Weight | 301 g |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364021501 |
| PU | 25 pc(s) |

^{*)} See test certificate for exact classification.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.