

CF 16 C-Fix for impact mounting 9116

CE
3/2021

Areas of application:

For mounting pipes to the inner side of plasterboard walls.

Installation Guide:

- Put the flexible pipe into the CF
- Hammer in the CF at the desired location

Product details:

Content pack/box 100 / 3.200

Pipe Ø 16

Torque values 11 kg

Product benefits/properties:

The C-Fix clip enables conduits to be mounted to plasterboard walls quickly and easily without drilling. The unique design ensures a strong grip and does not damage the outside of the wall.

Technical data:


Material Chromed steel, category of corrosion C3, raw material fulfilling EU guideline 2002/95/EG RoHS

Weight per piece 4,30 g

Max. recd. load Reference value: CF20: 85 N (8.5 kg) Plasterboard 15 mm, 110 N (11 kg) Plasterboard 25 mm

Breaking load Reference value: CF20: 119.60 N (11.9 kg) Plasterboard 15 mm, 169.00 N (16.9 kg) Plasterboard 25 mm

GTIN (EAN)

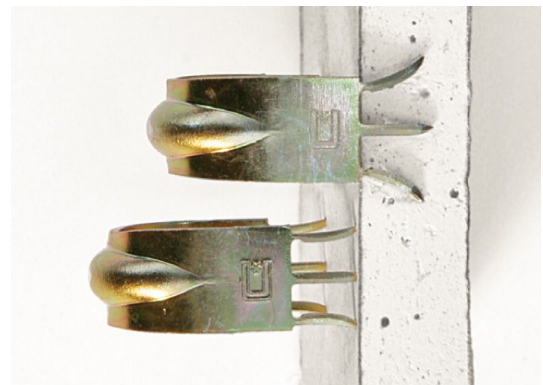

The C-Fix clip enables conduit to be mounted to plasterboard walls quickly and easily. The unique design ensures a strong grip and does not damage the outside of the wall. The flexible installation pipe is inserted into the CF, the CF is hit with a hammer - done!



Schnabl[®]
time saving products

Schnabl Stecktechnik GmbH, Bahnhofplatz 1, po box 63, 3100 St. Pölten, Austria
Telephone +43 2742 22167-0, office@schnabl.works, www.schnabl.works

Only the
ORIGINAL is
ingenious

