

# DSN 30 Dowel fastening nail 30320

CE 6/2022

## Areas of application:

Conduit installations: Affixing cable ducts, for smoke detectors and small lamps with the DSN.

## Installation Guide:

- Drill a 6 mm Ø hole
- Put Dowel Fastening Nail through a hole of the item to be fixed and push the DSN into the drill-hole.

## Product details:

Colour	light grey
Content pack/box	200 / 10.800
Nail length in mm	31

## Product benefits/properties:

Very good clamping effect thanks to nail heads special shape. No dowels or screws required. All products are for 01 - 20 mm material thickness suitable for E0 cables. The Dowel Fastening Nail DSN 30 is, due to his slim width of only 4.5 mm, suitable for time and effort saving mounting of fire detectors, lamps and many other objects in slotted holes.

## Technical data:

Material	PP, UV stabilised Temperature range: -10 °C up to +85 °C silicon-free <b>Material tested according OVR R14 (LSFOH)</b>
----------	---

Weight per piece 0,70 g


Max. recd. load 93.2 N concrete

Breaking load 233 N (23 kg) concrete

GTIN (EAN) 9 008439 403202



With the DSN 30 you will successfully fasten fire detectors, lamps and sockets at the push of a thumb.

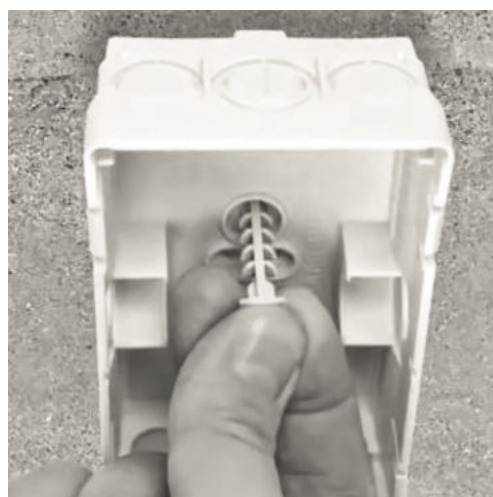

Schnabl Stecktechnik GmbH, Bahnhofplatz 1, po box 63, 3100 St. Pölten, Austria  
Telephone +43 2742 22167-0. office@schnabl.works. www.schnabl.works

