

# USA 16-20/55 automatic buried clamp

## 12530

CE 6/2022

### Areas of application:

For the simple plaster laying of flexible pipes on hollow brick.

### Installation Guide:

- Drill a 6 mm Ø hole
- Insert the USA in the drill-hole
- Insert flexible or rigid pipe into the USA and push down until it closes automatically

### Product details:

Colour	light grey
Content pack/box	100 / 2.400
Clamping range	16-20
Pipe dimension	
Dowel length in mm	55

### Mounting and usage instructions:

The USA automatically closes around the laid pipe. This clip is available in four ranges, but all are suitable for holding two pipe dimensions. For example the USA 20-25 can hold both a size 20 or a size 25 pipe. The USA can easily be opened without a tool.


### Product benefits/properties:

USA is a buried clamp for flexible pipes and tubes. For flush surface mounting. Saves you time!

### Technical data:

Material	PP Temperature range: -10 °C up to +85 °C silicon-free LSFOH halogen-free low-smoke tested according to OVE guideline R14
Weight per piece	2,10 g
Max. recd. load	Reference value: USA 20-25/25: 96.56 N concrete, 84.08 N solid brick, 93.88 N hollow brick, 42.64 N aerated Concrete, 76.48 N plasterboard
Breaking load	Reference value: USA 20-25/25: 241.40 N (24 kg) concrete, 210.20 N (21 kg) solid brick, 234.70 N (23 kg) hollow brick, 106 N (10 kg) aerated concrete, 191 N (19 kg) plasterboard

GTIN (EAN)

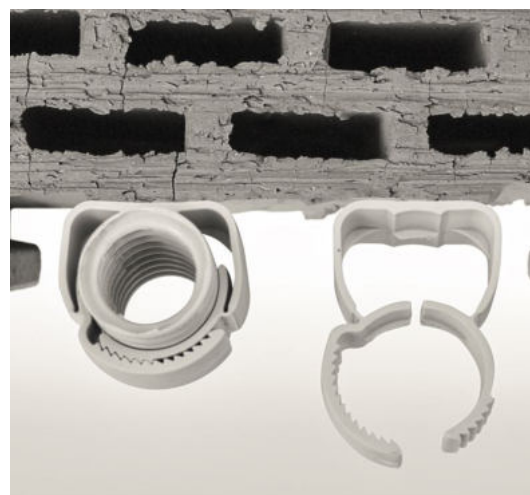

An innovative product for sub-plaster mounting - the Buried Clamp Automatic USA. A quick push is enough to affix the clamp to the pipe.



Schnabl Stecktechnik GmbH, Bahnhofplatz 1, po box 63, 3100 St. Pölten, Austria  
Telephone +43 2742 22167-0. office@schnabl.works. www.schnabl.works

