


DG PCB NPE FM (952 750)

- Integration of DEHNguard protection modules in the PCBs of electronic / electrical devices
- Easy and flexible use for all circuit configurations
- Coded base part and protection module ensure against installing an incorrect module



Figure without obligation

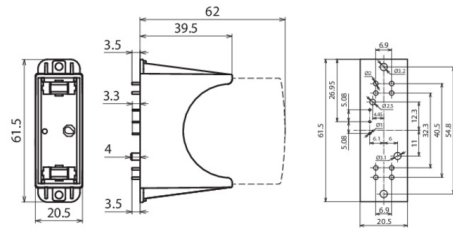

Dimension drawing DG PCB NPE FM

Single-pole base for DEHNguard modules to be mounted on the PCBs of devices, with remote signalling contact for monitoring system (floating changeover contact).

| Type | DG PCB NPE FM |
|---|--------------------------------------|
| Part No. | 952 750 |
| Associated protection module | DG MOD NPE (Part No. 952 050) |
| Max. continuous operating voltage (a.c.) (module) | 255 V |
| Operating temperature range (T _U) | -40 °C ... +80 °C |
| For mounting on | directly soldered into PCB |
| Enclosure material | thermoplastic, red, UL 94 V-0 |
| Degree of protection | IP 20 (protection module plugged in) |
| Type of remote signalling contact | changeover contact |
| Switching capacity (a.c.) | 125 V / 0.1 A |
| Switching capacity (d.c.) | 42 V / 0.5 A; 24 V / 1 A; 12 V / 2 A |
| Soldering temperature (remote signalling contact) | max. 260 °C / 5 sec. |
| Weight | 18 g |
| Customs tariff number (Comb. Nomenclature EU) | 85366930 |
| GTIN | 4013364149861 |
| PU | 72 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.