

EKV3+1 50 R VD28FAD (VD28FAD)

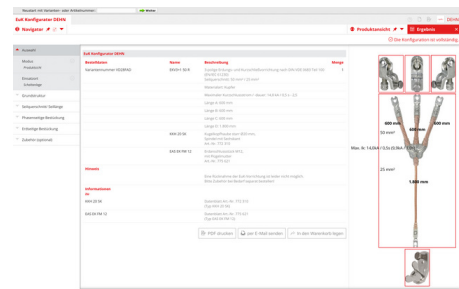


Figure without obligation

Type	EKV3+1 50 R VD28FAD	
Part No.	VD28FAD	
Phase cable end	KKH 20 SK	
Earth cable end	EAS EK FM 12	
For fixed ball point Ø	20 mm	
Cable cross-section Cu	50/25 mm ²	
Max. short-circuit current I _k 0.5 s	14.0 kA	
Max. short-circuit current I _k 1 s	9.9 kA	
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)	
Temperature range	-25 °C ... +55 °C	
Material (cable)	E-Cu, extra finely stranded and highly flexible	
Material (sheath)	Thermoplastic (soft PVC compound YM2)	
Weight	3,94 kg	
Customs tariff number (Comb. Nomenclature EU)	85359000	
GTIN	4013364165434	
PU	1 pc(s)	

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.