

**EL2 38EA LSA (907 993)**

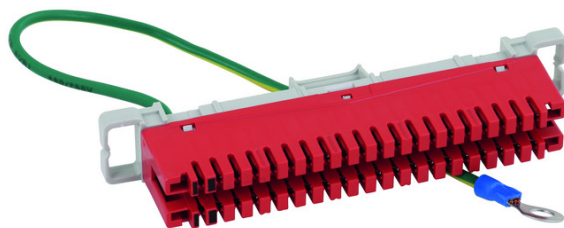


Figure without obligation

Series 2 for LSA technology for connecting up to 38 earth drain wires or unused signal cores. With earth wire and M4 ring cable lug.

Type	EL2 38EA LSA
Part No.	907 993
Earthing via	earthing conductor with M4 ring cable lug
Diameter of solid conductors	0.40 - 0.80 mm
Conductor diameter with insulation	0.70 - 1.50 mm
Contacting frequency for conductor diameters ≤ 0.65 mm	> 50 x
Contacting frequency for conductor diameters of 0.8 mm	≤ 50 x
Contact material	special brass
Contact surface	silver
Flame protection	UL 94 VO
Insulation resistance	5x 10,000 Mohms
Volume resistance of IPC terminal	< 10 mohms
Electric strength	2 kV / 50 Hz
Colour	red ●
Weight	60 g
Customs tariff number (Comb. Nomenclature EU)	85369010
GTIN	4013364048584
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.