


FLOODLIGHT AREA


LEDVANCE

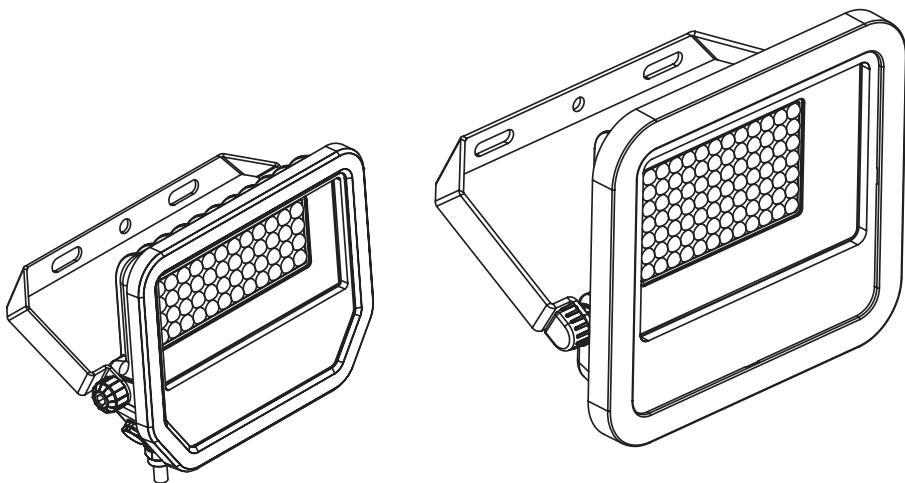


	EAN	l x w x h [mm]	W*	V _{AC}	Hz	lm*	lm/W
FL AREA V 16W ML 830 A48X85 BK	4099854427145	157x141x38	16/11 W	220-240V	50/60Hz	1850/1300 lm	118/116
FL AREA V 16W ML 840 A48X85 BK	4099854427169	157x141x38	16/11 W	220-240V	50/60Hz	2000/1400 lm	127/125
FL AREA V 32W ML 830 A48X85 BK	4099854427183	201x179x43	32/22 W	220-240V	50/60Hz	4200/3000 lm	136/131
FL AREA V 32W ML 840 A48X85 BK	4099854427206	201x179x43	32/22 W	220-240V	50/60Hz	4500/3250 lm	148/141
FL AREA V 50W ML 830 A48X85 BK	4099854427220	236x267x52	50/36 W	220-240V	50/60Hz	6500/4900 lm	136/130
FL AREA V 50W ML 840 A48X85 BK	4099854427305	236x267x52	50/36 W	220-240V	50/60Hz	7000/5250 lm	146/140
FL AREA V 67W ML 830 A48X85 BK	4099854427336	266x343x55	67/54 W	220-240V	50/60Hz	9300/7700 lm	143/139
FL AREA V 67W ML 840 A48X85 BK	4099854427381	266x343x55	67/54 W	220-240V	50/60Hz	10000/8250 lm	153/149
FL AREA V 100W ML 830 A48X85 BK	4099854427428	294x376x58	100/81 W	220-240V	50/60Hz	14000/11600 lm	143/140
FL AREA V 100W ML 840 A48X85 BK	4099854427459	294x376x58	100/81 W	220-240V	50/60Hz	15000/12500 lm	154/150
FL AREA V 133W ML 830 A48X85 BK	4099854427527	329x409x61	133/115 W	220-240V	50/60Hz	18600/16250 lm	141/140
FL AREA V 133W ML 840 A48X85 BK	4099854427558	329x409x61	133/115 W	220-240V	50/60Hz	20000/17500 lm	152/150

	EAN	K	IP	IK	∠	R _a	⌈ (°C)	PF	👤
FL AREA V 16W ML 830 A48X85 BK	4099854427145	3000	66	07	48°x85°	≥80	-30...+50	> 0.9	0.5 kg
FL AREA V 16W ML 840 A48X85 BK	4099854427169	4000	66	07	48°x85°	≥80	-30...+50	> 0.9	0.5 kg
FL AREA V 32W ML 830 A48X85 BK	4099854427183	3000	66	07	48°x85°	≥80	-30...+50	> 0.9	0.9 kg
FL AREA V 32W ML 840 A48X85 BK	4099854427206	4000	66	07	48°x85°	≥80	-30...+50	> 0.9	0.9 kg
FL AREA V 50W ML 830 A48X85 BK	4099854427220	3000	66	07	48°x85°	≥80	-30...+50	> 0.9	1.7 kg
FL AREA V 50W ML 840 A48X85 BK	4099854427305	4000	66	07	48°x85°	≥80	-30...+50	> 0.9	1.7 kg
FL AREA V 67W ML 830 A48X85 BK	4099854427336	3000	66	07	48°x85°	≥80	-30...+50	> 0.9	2.6 kg
FL AREA V 67W ML 840 A48X85 BK	4099854427381	4000	66	07	48°x85°	≥80	-30...+50	> 0.9	2.6 kg
FL AREA V 100W ML 830 A48X85 BK	4099854427428	3000	66	07	48°x85°	≥80	-30...+50	> 0.9	3.6 kg
FL AREA V 100W ML 840 A48X85 BK	4099854427459	4000	66	07	48°x85°	≥80	-30...+50	> 0.9	3.6 kg
FL AREA V 133W ML 830 A48X85 BK	4099854427527	3000	66	07	48°x85°	≥80	-30...+50	> 0.9	4.5 kg
FL AREA V 133W ML 840 A48X85 BK	4099854427558	4000	66	07	48°x85°	≥80	-30...+50	> 0.9	4.5 kg


FLOODLIGHT AREA

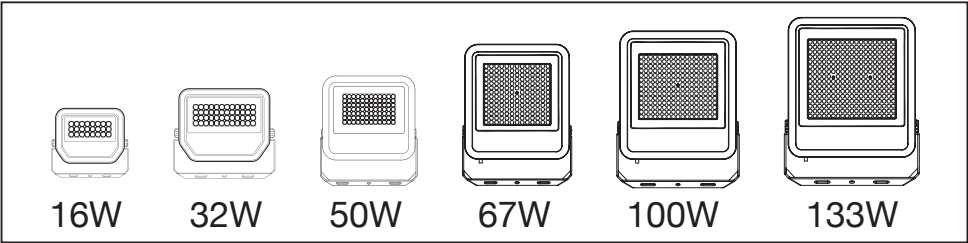


						230Vac		
						C10A	B16A	C16A
	A	B	C		 m²			
16 W	78	58	6.5	2x M5	0.015 m²	106	133	170
32 W	108	78	8.5	2x M6	0.025 m²	54	87	87
50 W	150	108	8.5	2x M6	0.045 m²	31	47	50
67 W	150	108	10.5	2x M8	0.070 m²	20	32	32
100 W	170	118	10.5	2x M8	0.085 m²	4	4	7
133 W	170	118	12.5	2x M10	0.105 m²	4	4	7

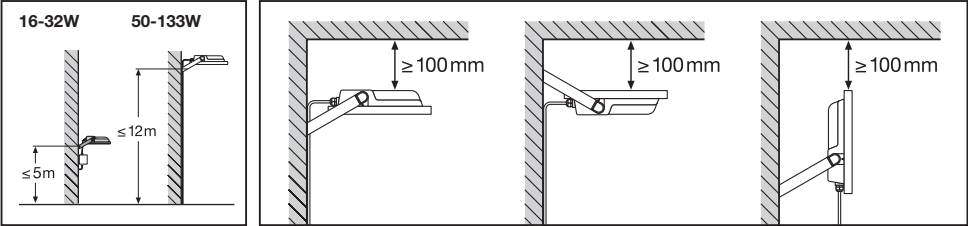


1




2




		d
a	16 W	70 mm
	32 W	95 mm
	50 W	130 mm
b	67 W	130 mm
	100 W	155 mm
	133 W	155 mm





2a






2b

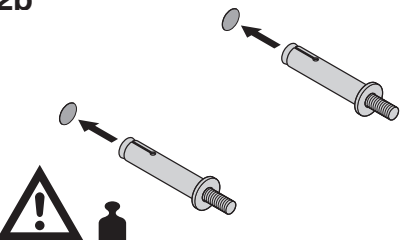


FLOODLIGHT AREA

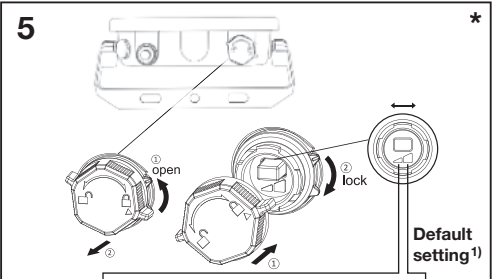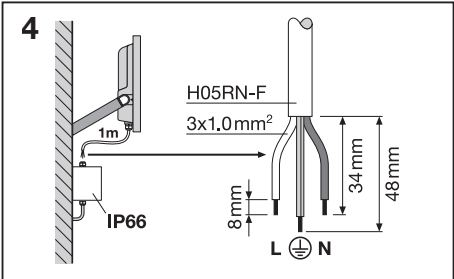
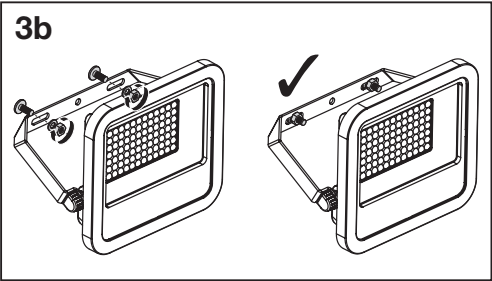
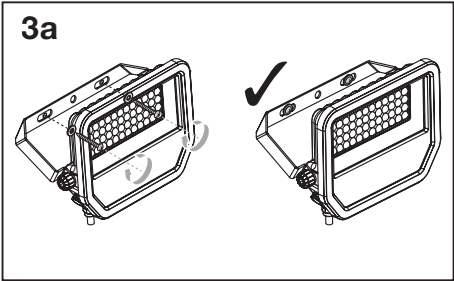


FL AREA V 16W ML 830 A48X85 BK	11 W/1300lm	16W/1850lm
FL AREA V 16W ML 840 A48X85 BK	11 W/1400lm	16W/2000lm
FL AREA V 32W ML 830 A48X85 BK	22 W/3000lm	32W/4200 lm
FL AREA V 32W ML 840 A48X85 BK	22 W/3250lm	32W/4500lm
FL AREA V 50W ML 830 A48X85 BK	36 W/4900lm	50W/6500lm
FL AREA V 50W ML 840 A48X85 BK	36W/5250lm	50W/7000lm
FL AREA V 67W ML 830 A48X85 BK	54 W/7700lm	67W/9300lm
FL AREA V 67W ML 840 A48X85 BK	54W/8250lm	67W/10000lm
FL AREA V 100W ML 830 A48X85 BK	81 W/11600lm	100W/14000lm
FL AREA V 100W ML 840 A48X85 BK	81W/12500lm	100W/15000lm
FL AREA V 133W ML 830 A48X85 BK	115W/16250lm	133W/18600lm
FL AREA V 133W ML 840 A48X85 BK	115W/17500lm	133W/20000lm

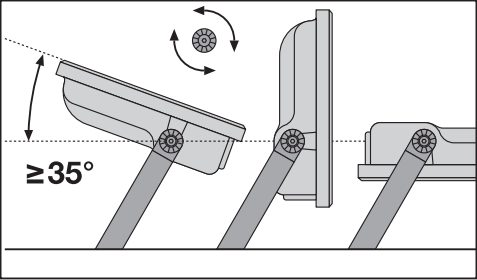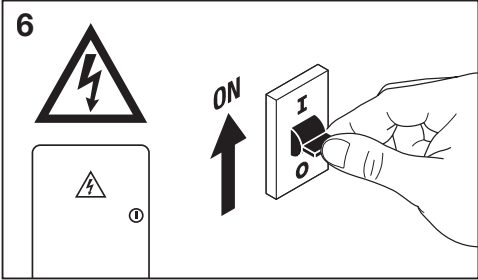

16-32W


50-133W

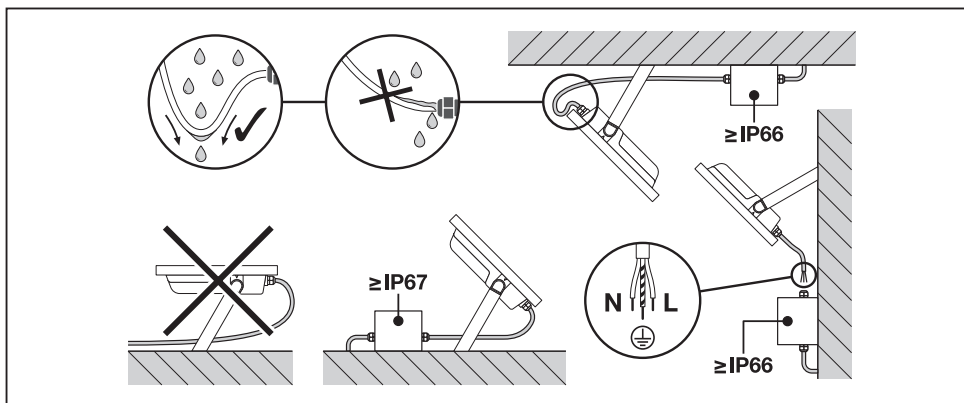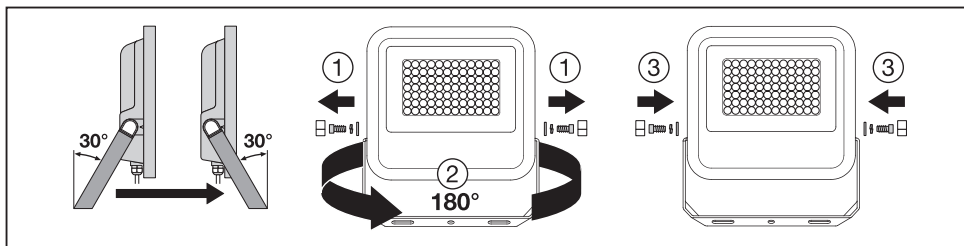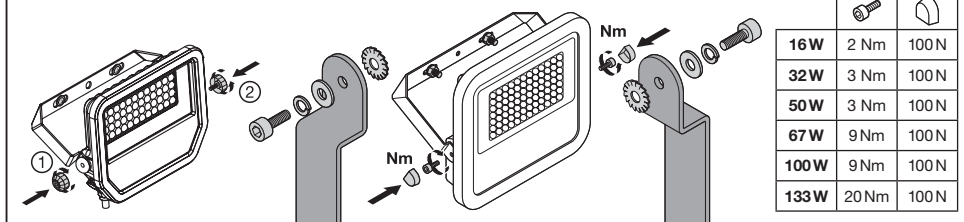

(Ⓔ) 1) Default setting (Ⓔ) 1) Standardeinstellung (Ⓔ) 1) Paramètres par défaut (Ⓔ) 1) Impostazioni predefinite (Ⓔ) 1) Configuración predeterminada (Ⓔ) 1) Configuração predefinida (Ⓔ) 1) Proepilegméni rýthmisi (Ⓔ) 1) Standaard instelling (Ⓔ) 1) Standardinställning (Ⓔ) 1) Oletusasetus (Ⓔ) 1) Standardinnstilling (Ⓔ) 1) Standardindstilling (Ⓔ) 1) Výchozí nastavení (Ⓔ) 1) Стандартная настройка (Ⓔ) 1) Alapértelmezett beállítás (Ⓔ) 1) Ustawienie domyślne (Ⓔ) 1) Predvolené nastavenie (Ⓔ) 1) Privzeta nastavitve (Ⓔ) 1) Varsayılan ayar (Ⓔ) 1) Zadane postavke (Ⓔ) 1) Setare implicite (Ⓔ) 1) Настройка по подразбиране (Ⓔ) 1) Vaikimisi seadistus (Ⓔ) 1) Numatytasis nustatymas (Ⓔ) 1) Noklusētais iestatījums (Ⓔ) 1) Podrazumevano podešavanje (Ⓔ) 1) Стандартне налаштування (Ⓔ) 1) Әдепкі параметр



PAP
Raccorta Carta
Verifica le disposizioni
del tuo comune.



LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

(Ⓔ) LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom

C10449057
G11232192

25.04.24

Points de collecte sur www.quefaireindemesdechets.fr
 Privilégiez la réparation ou le don de votre appareil !