



## ■ Features

- Plastic housing with class II design
- Built-in active PFC function
- Class 2 power unit (except NPF-90D-12/15)
- Standby power consumption <0.5W
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming (dim-to-off)
- Typical lifetime >50000hours
- 5 years warranty

## ■ Applications

- LED panel lighting
- LED downlight
- LED decorative lighting
- LED tunnel lighting
- Moving sign

## ■ Description


NPF-90D series is a 90W AC/DC LED driver featuring the constant current mode output.

NPF-90D operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40~+85°C case temperature under free air convection.

The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-90D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

## ■ Model Encoding


**NPF - 90 D - 20**

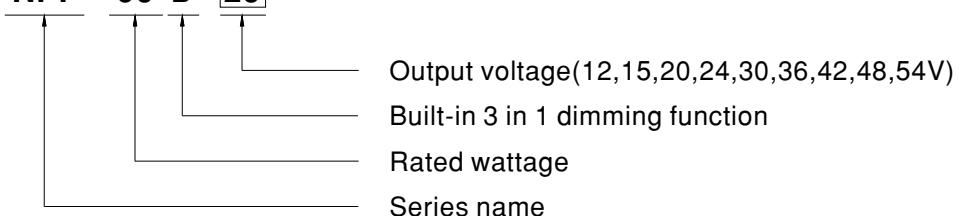

## SPECIFICATION


MODEL	NPF-90D-12	NPF-90D-15	NPF-90D-20	NPF-90D-24	NPF-90D-30	NPF-90D-36	NPF-90D-42	NPF-90D-48	NPF-90D-54	
OUTPUT	<b>RATED CURRENT</b>	7.5A	6A	4.5A	3.75A	3A	2.5A	2.15A	1.88A	1.67A
	<b>RATED POWER</b>	90W	90W	90W	90W	90W	90W	90.3W	90.24W	90.18W
	<b>CONSTANT CURRENT REGION</b>	7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	<b>CURRENT RIPPLE</b>	5.0% max. @rated current								
	<b>CURRENT TOLERANCE</b>	±5.0%								
	<b>SET UP TIME</b> Note.3	500ms/115VAC, 230VAC								
INPUT	<b>VOLTAGE RANGE</b> Note.2	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	<b>FREQUENCY RANGE</b>	47 ~ 63Hz								
	<b>POWER FACTOR (Typ.)</b>	PF ≥ 0.98/115VAC, PF ≥ 0.96/230VAC, PF ≥ 0.94/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	<b>TOTAL HARMONIC DISTORTION</b>	THD < 20%(@load ≥ 60%/115V, 230VAC; @load ≥ 75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	<b>EFFICIENCY(Typ.)</b>	88%	89%	90%	90%	89%	90%	90%	90%	90%
	<b>AC CURRENT (Typ.)</b>	0.95A / 115VAC	0.5A / 230VAC	0.4A / 277VAC						
	<b>INRUSH CURRENT(Typ.)</b>	COLD START 60A(twidth=550μs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	<b>MAX. NO. of PSUs on 16A CIRCUIT BREAKER</b>	3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC								
	<b>LEAKAGE CURRENT</b>	<0.25mA / 277VAC								
	<b>STANDBY POWER CONSUMPTION</b>	<0.5W								
PROTECTION	<b>OVER CURRENT</b>	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed								
	<b>SHORT CIRCUIT</b>	Hiccup mode, recovers automatically after fault condition is removed								
	<b>OVER VOLTAGE</b>	15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V
		Shut down o/p voltage, re-power on to recover								
	<b>OVER TEMPERATURE</b>	Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	<b>WORKING TEMP.</b>	Tcase=-40 ~ +85°C (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)								
	<b>MAX. CASE TEMP.</b>	Tcase=+85°C								
	<b>WORKING HUMIDITY</b>	20 ~ 95% RH non-condensing								
	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +80°C, 10 ~ 95% RH								
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 50°C)								
	<b>VIBRATION</b>	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
SAFETY & EMC	<b>SAFETY STANDARDS</b>	UL8750, CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13, EN62384 independent, IP67 approved ; Design refer to EN60335-1								
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3.75KVAC								
	<b>ISOLATION RESISTANCE</b>	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	<b>EMC EMISSION</b>	Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 60%) ; EN61000-3-3								
	<b>EMC IMMUNITY</b>	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level(surge immunity Line-Line 2KV)								
OTHERS	<b>MTBF</b>	916.7K hrs min. Telcordia SR-332 (Bellcore) ; 231.2K hrs min. MIL-HDBK-217F (25°C)								
	<b>DIMENSION</b>	171*63*37.5mm (L*W*H)								
	<b>PACKING</b>	0.77Kg; 18pcs/14.9Kg/0.82CUFT								
<b>NOTE</b>	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 4. The standby power consumption is specified for 230VAC. 5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 6. The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model . Please contact MEAN WELL for details. 7. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly $T_{C_{(C)}}$ point (or TMP, per DLC), is about 75°C or less. 8. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a>									

## ■ BLOCK DIAGRAM

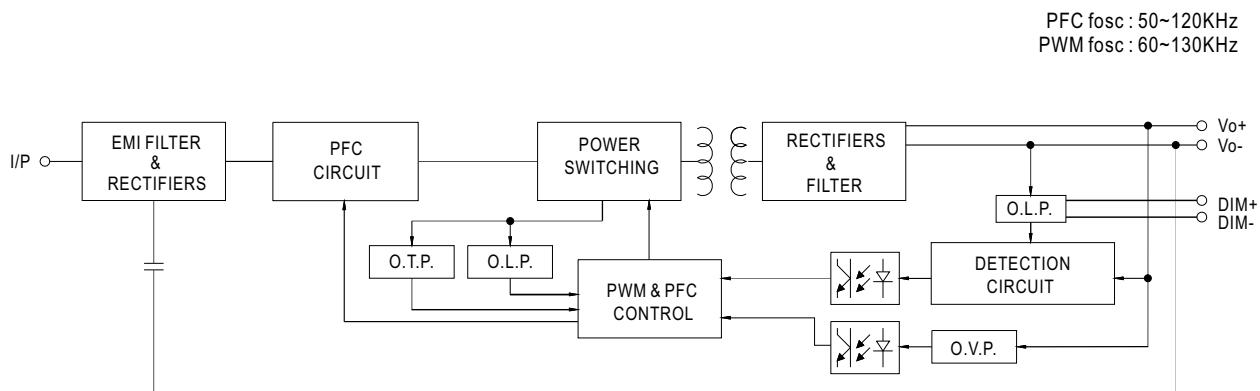

## ■ DRIVING METHODS OF LED MODULE


※ This series works in constant current mode to directly drive the LEDs.

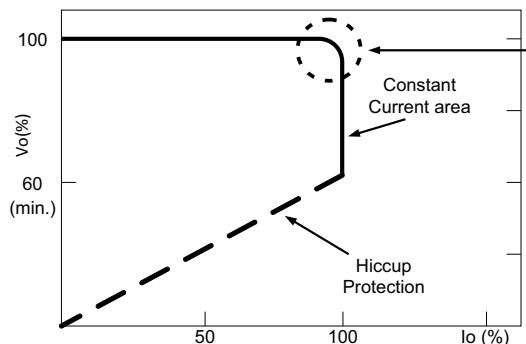

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.  
Should there be any compatibility issues, please contact MEAN WELL.

Typical LED power supply I-V curve


## ■ DIMMING OPERATION

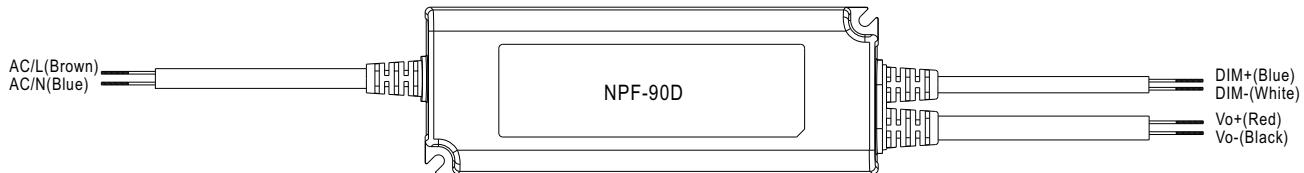



## ※ 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 $\mu$ A (typ.)


## ◎ Applying additive 0 ~ 10VDC

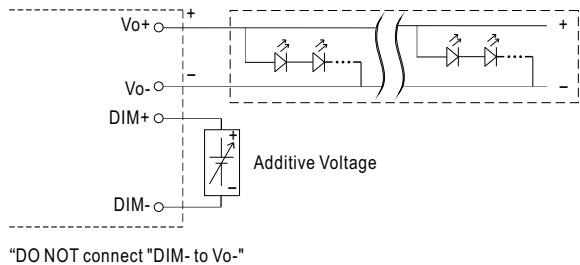

## ■ OUTPUT LOAD vs TEMPERATURE

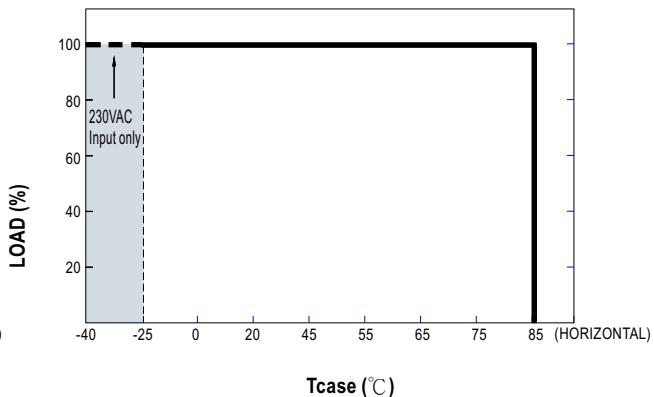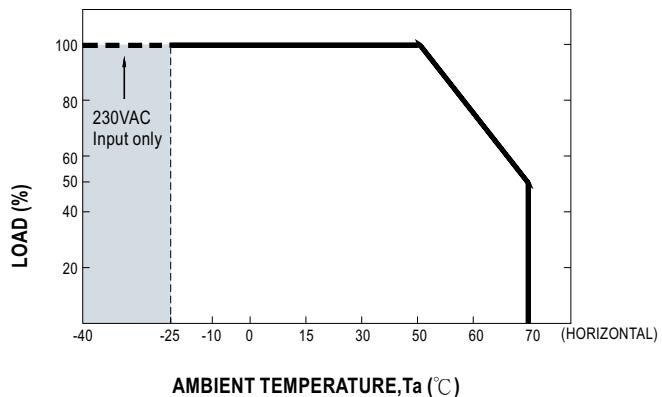


## ■ STATIC CHARACTERISTIC

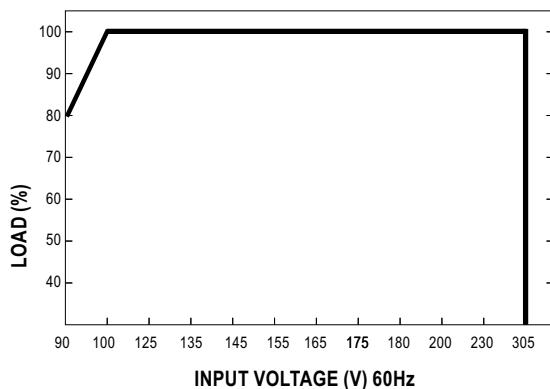


※ De-rating is needed under low input voltage.

## ■ POWER FACTOR (PF) CHARACTERISTIC

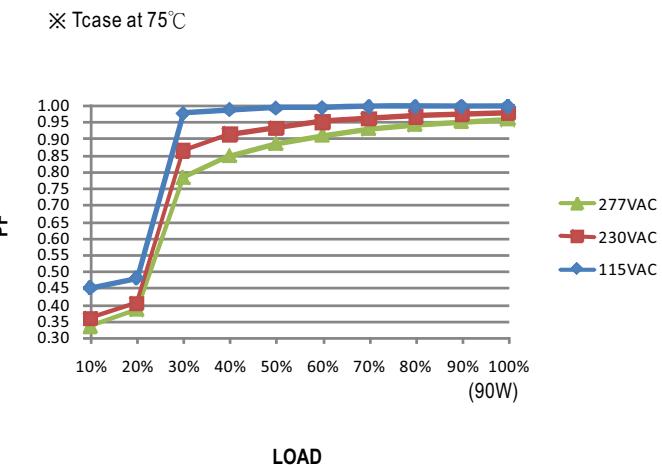

## ■ TOTAL HARMONIC DISTORTION (THD)


※ 48V Model, Tcase at 75°C

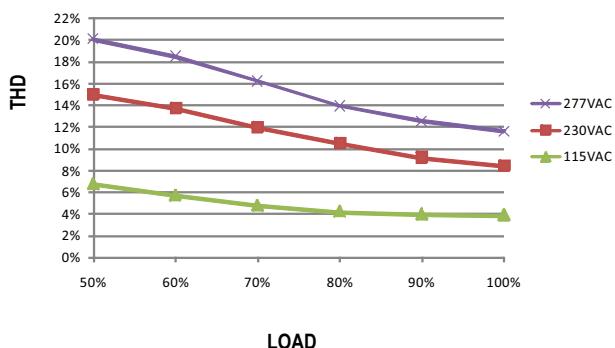


## ■ EFFICIENCY vs LOAD

NPF-90D series possess superior working efficiency that up to 90.5% can be reached in field applications.

※ 48V Model, Tcase at 75°C


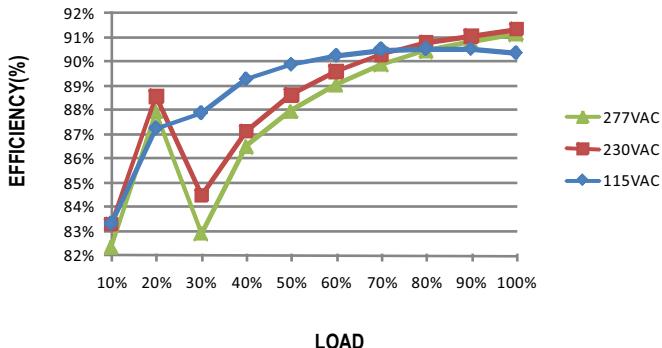


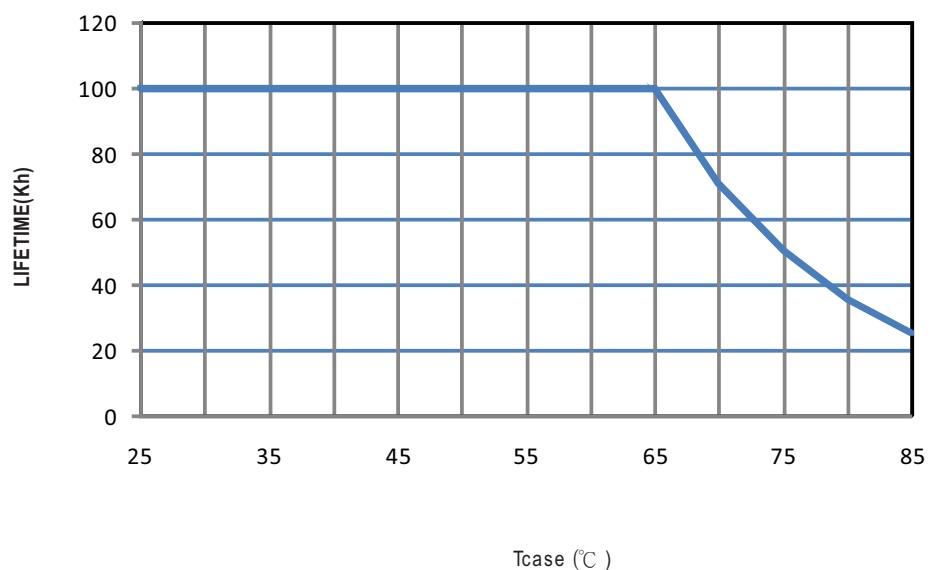**LIFE TIME**

**■ MECHANICAL SPECIFICATION**

Case No. PWM-90P

Unit:mm

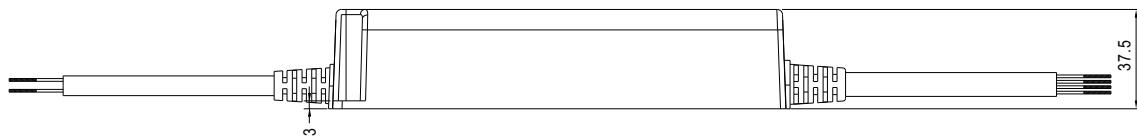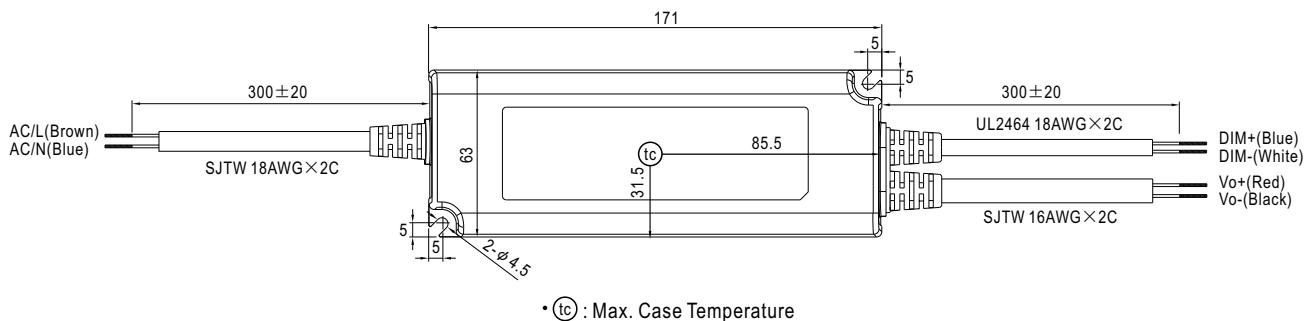**■ INSTALLATION MANUAL**Please refer to : <http://www.meanwell.com/manual.html>