

19121000	DATA SHEET	
Valid from: 17.06.2025	EPIC® H-B 24 TG/TS	

Description

- The standard for housings. Large selection of different inserts.
- Easy-to-grip, user-friendly design makes it easy to plug and unplug the connector.



General Characteristics

Series	H-B 24
Locking	pins for double lever
Cable entry	top / side
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	4, 12 (latched)
Temperature Range	-40°C to +125°C

Materials and Surfaces

Housing	aluminium alloy, powder-coated, grey
---------	--------------------------------------

Approvals

UL-Approval, E-File-Number	E75770
----------------------------	--------

Standard

Safety Standard	IEC 61984
-----------------	-----------

Versions


Article number	Article description	Thread M	Cable entry
19121000	EPIC® H-B 24 TG M25	M25x1,5	top
19111000	EPIC® H-B 24 TG M32	M32x1,5	top
19111500	EPIC® H-B 24 TG M40	M40x1,5	top
44422019	EPIC® H-B 24 TG 2 x M25	2 x M25x1,5	top
44422020	EPIC® H-B 24 TG 2 x M32	2 x M32x1,5	top
19113000	EPIC® H-B 24 TS M25	M25x1,5	side
19123000	EPIC® H-B 24 TS M32	M32x1,5	side

Creator: VACH1/BU EPIC Released: TODV1/BU EPIC	Document: DB19121000EN Version: 03	Page 1 of 2
---	---------------------------------------	-------------


19121000	DATA SHEET	
Valid from: 17.06.2025	EPIC® H-B 24 TG/TS	

Technical Drawings

Top cable entry

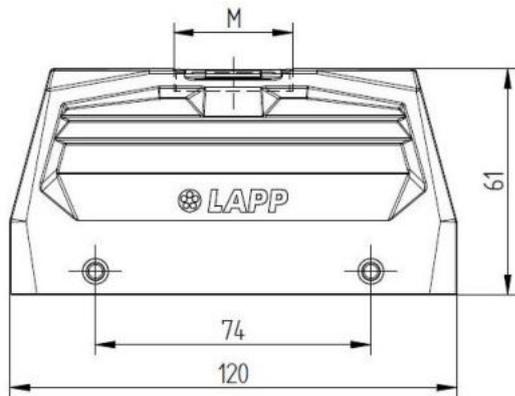

Side cable entry

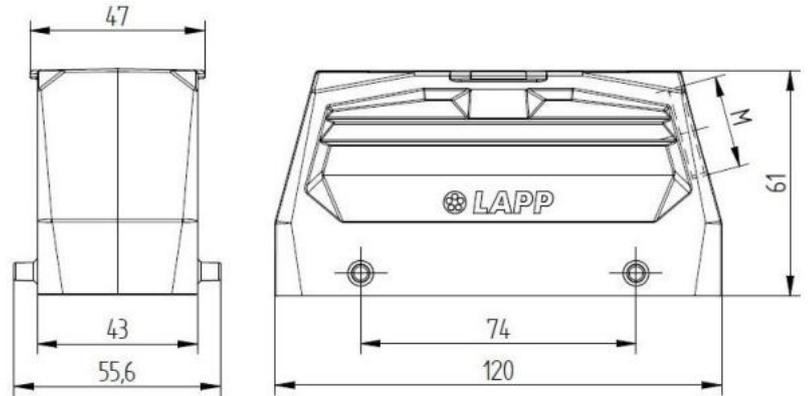

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



Automation

Info

Universal, robust metal housings size H-B 24

Application range

Plant engineering, Light & sound technology, Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: VACH1/BU EPIC Released: TODV1/BU EPIC	Document: DB19121000EN Version: 03	Page 2 of 2
---	---------------------------------------	-------------