


22260410	DATA SHEET	
Valid from: 21.12.2023	AB-C5-M12MS-(L*)PUR-M12FS	

Product description

- Sensor/actuator cable, 5 pol, PUR halogen-free, black
- Straight M12-plug on straight M12-jack



General characteristics

Number of pins	5
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -25 °C to +80 °C (-13°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260410	AB-C5-M12MS-0,3PUR-M12FS	0,3	straight - straight
22260411	AB-C5-M12MS-0,6PUR-M12FS	0,6	straight - straight
22260412	AB-C5-M12MS-1,0PUR-M12FS	1	straight - straight
22260413	AB-C5-M12MS-2,0PUR-M12FS	2	straight - straight
22260866	AB-C5-M12MS-3,0PUR-M12FS	3	straight - straight
22260724	AB-C5-M12MS-5,0PUR-M12FS	5	straight - straight
22260723	AB-C5-M12MS-10,0PUR-M12FS	10	straight - straight
22260864	AB-C5-M12MS-12,0PUR-M12FS	12	straight - straight
22260865	AB-C5-M12MS-15,0PUR-M12FS	15	straight - straight
22260867	AB-C5-M12MS-17,0PUR-M12FS	17	straight - straight
22262122	AB-C5-M12MS-20,0PUR-M12FS	20	straight - straight
22260472	AB-C5-M12MS-25,0PUR-M12FS	25	straight - straight
22260473	AB-C5-M12MS-40,0PUR-M12FS	40	straight - straight


Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	48 V AC / 60 V DC
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260410EN Version: 06	Page 1 of 3
---	---------------------------------------	-------------

22260410	DATA SHEET	
Valid from: 21.12.2023	AB-C5-M12MS-(L*)PUR-M12FS	

Mechanical properties

Plug, jack

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Seal, material	NBR


Line

Cable construction	5 x AWG22/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,34 mm ²
Conductor diameter including isolation	1,27 mm ± 0,02 mm
Cable outer diameter	5,0 mm ± 0,15mm
Insulation color	brown, white, blue, black, green/yellow
Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s ²
Cable weight	33 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 16 GΩ*km (at 20 °C)
Conductor resistance	≤ 58 Ω/km (at 20 °C)
Flame resistance	acc. to UL 758 / 1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A suitable for drag chains, silicone-free

Standards


Product standard, M12 connector	IEC 61076-2-101
UL-Listed, E-File	E249137

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260410EN Version: 06	Page 2 of 3
---	---------------------------------------	-------------

22260410	DATA SHEET	
Valid from: 21.12.2023	AB-C5-M12MS-(L*)PUR-M12FS	


Technical drawing

Dimensional drawing

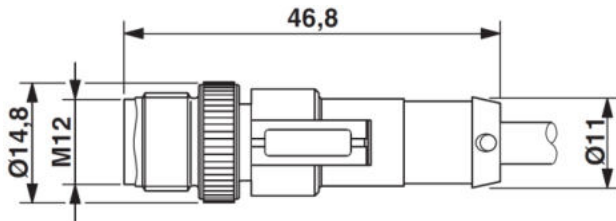


Plug M12 x 1, straight

Dimensional drawing

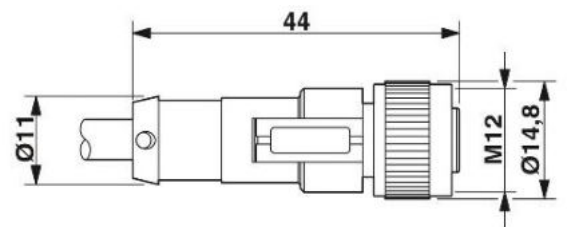


Jack M12 x 1, straight

Drawing



Pin assignment M12-plug, 5-pol, A-coding

Drawing

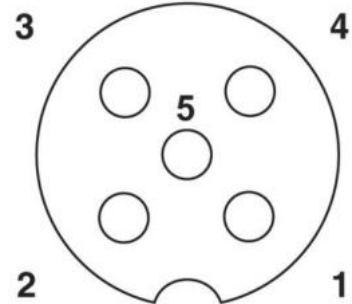


Pin assignment M12-jack, 5-pol, A-coding

Circuit diagram



Pin assignment between M12-plug and M12-jack

Wire cross section

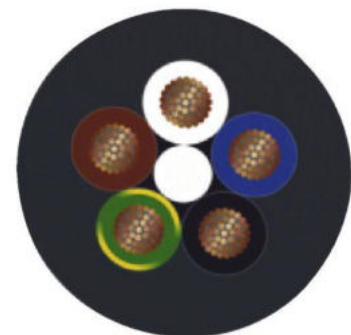

Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260410EN Version: 06	Page 3 of 3
---	---------------------------------------	-------------