

ELIA CL



ELIA CL is an LED device made from white polycarbonate designed for ceiling or surface mounting, ideal for lighting stairways, bathrooms/rest rooms and service areas. It is quick and easy to install, and features clean, minimalist lines. Designed in two different sizes and power versions, it features a polycarbonate opal diffusing shell, a colour temperature of 4,000 K (neutral white) and a colour rendering index of more than 80. ELIA CL is also available in the Sensor version, with movement detection up to 8m, a radius of up to 120° and duration of 30 seconds, and in the Emergency version, the luminous flux is guaranteed for 3 hours of operation at 10%. It has been designed to withstand temperature variations from -20°C to +45°C, and offers protection from water and dust penetration of up to level IP54 and from shocks and impacts of up to level IK08. Light and easy to handle, ELIA CL is easy to install thanks to the steel bracket on the back of the device for wall mounting, the quick-coupling terminal on the rear of the device for the electrical wiring and the bayonet locking mechanism for attaching the body of the light.

GENERAL INFORMATION

Context	Illuminazione di interni
Luminaire	LED luminaire for diffuse light
Application	Internal
Unique digital code (Datamatrix)	Currently not present
Colour	White
Type of light source	LED
System power	12 W
LED Lifetime	L80B50 (Tq25°) = 50.000h
Weight (kg)	0.5

OPTIC AND ILLUMINATING FEATURES

Optic	Wide opal
Unified Glare Rating	-
Lumen output (lm)	1300
Efficiency (lm/W)	108
Colour temperature	4000 K
Color Rendering Index	CRI 80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0
Standard	EN 60598-1; EN 60598-2-1; IEC/TR 62778; EN 62493

Warranty	5 years
Stocking temperature	-20° +65°
Operating temperature	-20° +45°

MATERIALS

Body	Polycarbonate
Shield type	Polycarbonate
Optic	Diffusore opale in polycarbonato
Gasket	-
Locking Hook	-
External screw	-
Colour	Polycarbonate coloured in paste

ELETRICAL AND LIGHTING FEATURES

Supply voltage	220-240 V
Rated frequency (Hz)	50 / 60
Driver	Built-in
Driver failure rate	F025 (Tq=25°C) = 50.000 h
Overvoltage protection	DM 0,5 kV
Control System	ON / OFF


INSTALLATION AND MAINTENANCE

Mounting and installation	Ceiling - Wall
Tilt	-
Wiring	Con morsetto integrato
Fixing	Tramite staffa in acciaio posteriore integrata
Light source replaceability	Non-replaceable
Controlgear replaceability	Non-replaceable
Driver Box	Built-in
Maximum surface exposed to the wind	-


STANDARDS AND APPROVALS

Classification	-
Device with reduced surface temperature	-
DIN 18032-3 certification	-
IPEA	-
Insulation class	II
IP degree	IP20 - IP54
Mechanical resistance	IK08
Glow Wire Test	750 °C

DIMENSIONAL

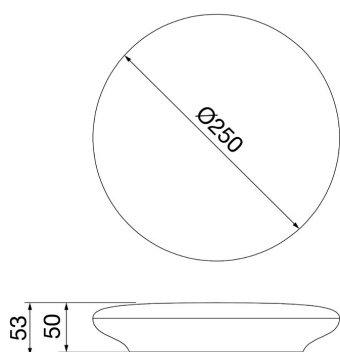

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP

IP20 - IP54

IK

IK08

GWT

750 °C

STANDARDS/APPROVALS

Data, measures, designs and pictures are for information purpose only, last update 30/10/2022. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>. - 1 of 2

