



RD 10 V2A R80M (860 910)

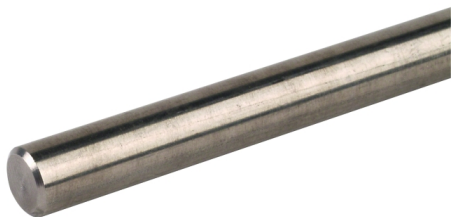


Figure without obligation

Stainless steel wire according to EN 62561-2, for lightning protection systems or equipotential bonding.

| Type | RD 10 V2A R80M |
|---|-------------------------------|
| Part No. | 860 910 ✓ |
| Diameter Ø conductor | 10 mm |
| Cross-section | 78 mm ² |
| Material | StSt |
| Material No. | 1.4301 / 1.4303 |
| Standard | based on EN 62561-2 |
| Conductivity | ≥1.25 m / Ohm mm ² |
| Resistivity | ≤ 0.8 Ohm mm ² / m |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 2.9 kA |
| Weight | 617 g/m |
| Customs tariff number (Comb. Nomenclature EU) | 72210010 |
| GTIN | 4013364019300 |
| PU | 80 m |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Conductor materials can only be supplied in the original coil weights.

Further conductor materials as specified in the standard series EN 62561-2 are available on request.