


NOSNÍKY, KONZOLY A PODPŮRNÉ ŽLABY

FIXING RAILS, CANTILEVER ARMS AND SUPPORTING GALVANIZED CHANNELS

KONZOLA ST 41*41*2,50MM CANTILEVER ARM TYPE ST 41*41*2,50MM

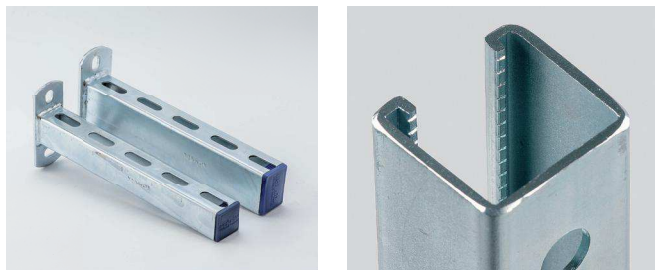

Popis:

Nosníky s nástěnnou konzolou ST (STRUT) slouží k upevnění na stěnu, podlahu a další konstrukce.

Konzoly ST ve spojení s montážními nosníky a dalšími prvky závěsové techniky umožňují vytvořit velký počet konstrukčních řešení pro upevnění potrubních, kabelových a vzduchotechnických systémů

Konzoly jsou dodávány včetně plastové sňimatelné čepičky.

Description:

ST cantilever arms (STRUT) are used for the fixing of pipes directly to walls, floors and other constructions.

A wide range of structural designs can be created using the ST cantilever arms in connection with fixing rails and other components of suspension technique for the fixing of pipe, cable and air conditioning systems.

Cantilever arms are supplied including removable plastic end cap.

Technické údaje / Technical data:

galvanicky pozinkovaný plech jakosti DX51D + Z100 (Z140) / zinc plated metal sheet class DX51D + Z100 (Z140)


Hodnoty jsou uvedeny dle platné normy EUROCODE 3 (maximální povolený průhyb pro tenkostěnné profily = 1/200 L).
The data are according with norm EUROCODE 3 (maximum acceptable deflection for thin-wall profiles = 1/200 L).

Moment setrvačnosti (otevření profilu vpravo/vlevo): $I_y = 6,19 \text{ cm}^4$
The moment of inertia (for profile which is opened right or left):

Moment setrvačnosti (otevření profilu nahoru/dolů): $I_z = 9,05 \text{ cm}^4$
The moment of inertia (for profile which is opened up or down):

Moment průřezu (otevření profilu vpravo/vlevo): $W_y = 2,96 \text{ cm}^3$
Cross-section moment (for profile which is opened right or left):

Moment průřezu (otevření profilu nahoru/dolů): $W_z = 4,41 \text{ cm}^3$
Cross-section moment (for profile which is opened up or down):

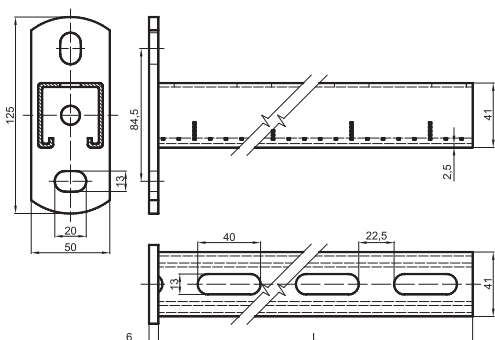

Obj. číslo Supply No.	Název Name	Povrch Surface	Délka Length L (mm)	Tloušťka Thickness T (mm)	Balení Package (ks/pcs)
32841200	Konzola / Cantilever arm / ST 41x41x200mm	pozink / zinc plated	200	2,50	10
32841300	Konzola / Cantilever arm / ST 41x41x300mm	pozink / zinc plated	300	2,50	10
32841450	Konzola / Cantilever arm / ST 41x41x450mm	pozink / zinc plated	450	2,50	10
32841500	Konzola / Cantilever arm / ST 41x41x500mm	pozink / zinc plated	500	2,50	10
32841600	Konzola / Cantilever arm / ST 41x41x600mm	pozink / zinc plated	600	2,50	10
32841750	Konzola / Cantilever arm / ST 41x41x750mm	pozink / zinc plated	750	2,50	6
32841800	Konzola / Cantilever arm / ST 41x41x800mm	pozink / zinc plated	800	2,50	6
32841900	Konzola / Cantilever arm / ST 41x41x900mm	pozink / zinc plated	900	2,50	6
32841980	Konzola / Cantilever arm / ST 41x41x1000mm	pozink / zinc plated	1000	2,50	6
32841990	Konzola / Cantilever arm / ST 41x41x1500mm	pozink / zinc plated	1500	2,50	6

Montážní postup / Mounting procedure

