

DHI 17 Insulation fixing 31590

CE 3/2021

Areas of application:

For the simple mounting of electrical equipment. The DHI is used to fasten clips, junction boxes and light cable trays, on insulated ceilings and walls.

Installation Guide:

- Drill a 10 mm Ø hole with a minimum depth of 45mm into the concrete
- Insert the Insulation Fixing into the hole
- Add EC clamps and other items using 4/4.5 mm screws into the DHI

Product details:

Colour	light grey
Content box	75
Insulation length	10-14 cm
Total length cm	17,5

Mounting and usage instructions:

Minimum setting depth in the stable subsurface = 45 mm, drilling diameter = 10 mm, minimum drilling depth = overall length DHI + 10 mm - insulation thickness. Recommended screws: Steel sheeting- or chipboard screw 4 mm Ø, Screw-in depth in DHI = 10 - 15 mm


Product benefits/properties:

Easy to insert by simply pressing with the thumb, no thermal bridge.

Technical data:

Material	PA 6, UV stabilised Temperature range: -20 °C up to +85 °C silicon-free halogen-free
Weight per piece	13,00 g
Max. recd. load	Reference value: DHI15: 550 N (55 kg) concrete, 500 N (50 kg) hollow brick, 260 N (26 kg) aerated brick
Breaking load	Reference value: DHI15: 780.60 N (78 kg) concrete, 707.80 N (70 kg) hollow brick, 828.70 N (82 kg) solid brick, 378.70 N (37.8 kg) aerated brick

GTIN (EAN)

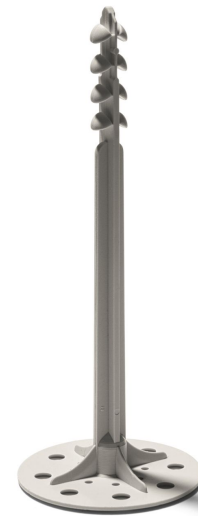

With the DHI insulation fixing, you do not just mount the insulation ... but also the electricity supply.



Schnabl
time saving products

Schnabl Stecktechnik GmbH, Bahnhofplatz 1, po box 63, 3100 St. Pölten, Austria
Telephone +43 2742 22167-0, office@schnabl.works, www.schnabl.works

Only the
ORIGINAL is
ingenious

